


500

FSS 500 4 x 4



GVM: 10,000kg
*GCM: 14,000/15,000kg
WHEELBASE: 3,650mm

ISUZU 6BG1 ENGINE PERFORMANCE

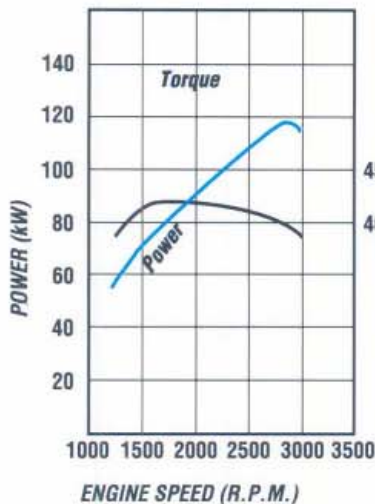


- Type: 6 cylinder OHV diesel, four stroke, direct injection
- Bore x Stroke (mm) 105 x 125
- Displacement 6494 (cc)
- Compression Ratio (:1) 17.0
- Output-Power (kW) 120 @ 2900 rpm (DIN Nett)
- Torque (Nm) 431 @ 1800 rpm (DIN Nett)

DIMENSIONS AND WEIGHTS

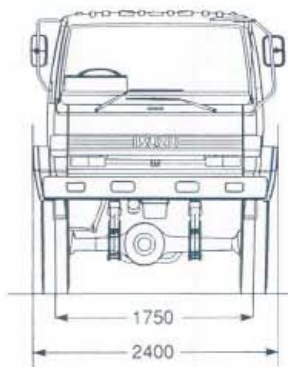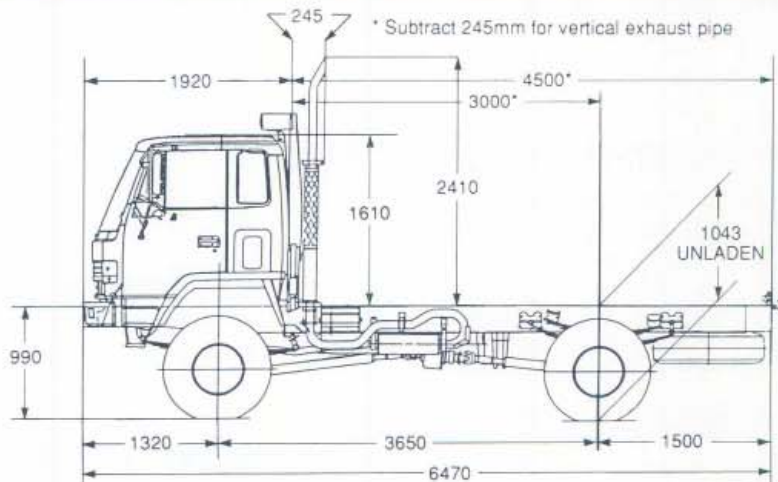

*ESTIMATED KERB MASS (kg)	
FRONT	2500
REAR	1530
TOTAL	4030
FRAME WIDTH (mm)	800
TURNING CIRCLE (m)	
Kerb to Kerb	16.6
BODY LENGTH (mm)	4870
Subject to weight distribution	

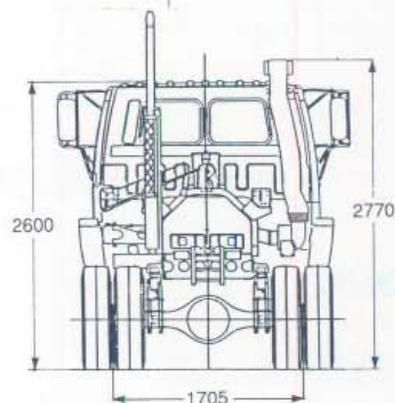

*Chassis and cab with oil, water and fuel tank containing 10 litres of fuel.
*14,000 kg off road 15,000 kg on road

ISUZU-GENERAL MOTORS AUSTRALIA LTD A.C.N. 006 962 572

12/50 WARRANTY. Every Isuzu Truck is covered by the I-GM new vehicle warranty which covers your vehicle for the first 12 months or 50,000 kilometres.
PLEASE NOTE: as the policy of Isuzu-General Motors Australia Limited is one of continual product improvement, all specifications and equipment are subject to change without notice. Body illustrated are not standard. No I-GM dealer or other person is authorised or permitted to give or make any statement, assertion or undertaking in relation to the quality performance characteristics descriptions or fitness for any purpose of any I-GM product or in connection with the supply of any I-GM product which is at variance with any written statement assertion or undertaking on any of these subjects given or made by Isuzu-General Motors Australia Limited in its published sales literature, and the company excepts no liability for any such unauthorised action. Isuzu-General Motors Australia Limited has franchised dealers in many parts of Australia. For the sale of service parts and the provision of service to owners of I-GM products. Every endeavour is made to ensure that such dealers carry adequate stocks of service parts, and are equipped to provide satisfactory service, but makes no promise, other than that contained in the New Vehicle Warranty given by Isuzu-General Motors Australia Limited, that such parts or service facilities will be available, or available at any specific location or any particular time.





500

FSS 500 4 x 4

ORDERING CODE:
8E02-821

ENGINE - ISUZU 6BG1

Lubrication:

- Pressure feed lubrication with full flow, paper element filter, oil cooler. Oil capacity 12.5 litres including filter.

Cooling System:

- Six blade plastic cooling fan with thermatic clutch. Size 475 mm diameter.
- Tube and corrugated fin pressure type radiator size (mm) 622 h x 559 w x 71 t, frontal area 0.348 m² with bell mouth fan shroud.

FUEL SYSTEM

- Two stage paper element air cleaner, Donaldson 11" with vertical air intake stack and rain head.
- In line plunger, Bosch 'A' type fuel injection pump with mechanical all speed governor.
- In line paper filter, see-through water separator with drain cock.
- Fuel tank capacity 160 litres.
- Horizontal exhaust muffler with vertical stack.

CLUTCH

- Hydraulic control, dry single plate with coil type cushioning springs, 350 mm (14") dia.
- Asbestos free lining material. Total swept area (both sides) 1054 cm².

TRANSMISSION - ISUZU MBG5B

- Five speed, direct drive, constant mesh, synchromesh on gears 2-5. Oil capacity 5.0 litres.
 - Gear Ratios:1
- | | |
|----------------|-------|
| 1st | 6.890 |
| 2nd | 3.918 |
| 3rd | 2.419 |
| 4th | 1.466 |
| 5th | 1.000 |
| Reverse | 6.304 |
- Maximum geared speed 100 km/h
 - Two speed transfer case with air assisted shift controls, oil capacity 3 litres.

Ratios:1
High - 1.000 **Low** - 2.091

- Three piece propeller shaft
- | | Diameter | Length |
|-------------------------------|----------|------------|
| Transmission to transfer case | 67 mm | 355 mm |
| Transfer case to front axle | 90 mm | 1,394.6 mm |
| Transfer case to Rear axle | 90 mm | 807.5 mm |

REAR AXLE - R065 CAPACITY 6,500 kg

- Banjo type fully floating, with No-Spin differential. Ratio 5.125:1
- Hypoid type ring gear, 365 mm diameter Oil capacity 7.5 litres.

REAR SUSPENSION

- Semi-elliptical, alloy steel, tapered, multi-leaf springs. Fully wrapped eye with greasable shackles.

- Size: Length - width x thickness, No. leaves:
Main: 1300 - 70 x 11, 3 leaves
70 x 12, 4 leaves
Auxiliary: 850 - 70 x 10 mm, 3 leaves
70 x 11 mm, 4 leaves

FRONT AXLE - F0039 CAPACITY 3,900 kg

- Split type, fully floating with Birfield type steering ball joint. Ratio 5.125:1
- Spiral bevel type ring gear, 365 mm diameter Oil capacity 3.8 litres.

FRONT SUSPENSION

- Semi-elliptical, alloy steel, tapered multi-leaf springs. Fully wrapped eye with greasable shackles.
- Size: Length - width x thickness, No. leaves:
1350 - 70 x 12 mm, 5 leaves
70 x 16 mm, 1 leaf
- Hydraulic, double acting, telescopic shock absorbers.

STEERING

- Fully integral, power assisted, recirculating ball type. Gear ratio :1 16.1-18.8 variable. Turns lock to lock 4.6
- Gear driven vane type oil pump, oil capacity 2.0 litres.

BRAKES

- Air over hydraulic, dual circuit, front two leading, rear dual two leading drum diameter front, 400 mm rear 410 mm. Total swept area 5,849 cm².
- Spring parking brake acting on rear wheels.
- Butterfly, air controlled, exhaust brake system, activation switch on wiper/washer control stalk.

CHASSIS FRAME

- Parallel rail, ladder type, channel section, cold riveted.
- Side member dimensions: 225 x 70 x 6 mm
- Frame reinforcement 203 x 64 x 4.5 mm at back of cab.
- Material, SAPH45 mild steel.

WHEELS AND TYRES

- 6.50 T x 20 - 8 stud disc wheels front and rear.
- 20mm bolt size, 145mm offset.
- 8.25R 20 - 14ply Michelin XZY tubed radial tyres. Front and rear.
- Number of tyres 7, including spare.
- Tyre inflator hose and fitting.
- Winch type spare wheel carrier.

ELECTRICAL SYSTEM

- Batteries 2 x 12 Volt - 55 amp/hour, negative earth.
- Alternator 24 Volt - 40 amp.
- Starter motor 24 Volt - 4.5 kW output.
- Rear stop and tail lamps and licence plate lamp with long leads for variable body mounting.

CAB EXTERIOR

- All steel cab, manual tilt to 45°. Cation electro deposition primer. Torsion bar counter balanced.
- Heavy duty bumper bar with four rectangular halogen headlamps inset.
- Access to engine fluid checks without tilting cab.
- Combination turn signal and park lamps.
- West Coast type rear view mirrors with clearance lamps.
- Tinted laminated windshield, 2 speed wiper with intermittent mode and washers.
- Tinted quarter vent, side and rear glass.
- Corrosion resistant, non slip cab entry steps.
- Tool kit with 7,000kg capacity jack.

CAB INTERIOR

- Fully trimmed cab interior with two tone cloth seat facings, formed roof lining and overhead parcel shelf with driver and passenger sunvisors.
- ISRI 6000 driver's seat with mechanical suspension, adjustment for seat back recline, seat slide and height control.
- Outboard reclining passenger seat, folding centre seat back with lockable compartment and snack tray.
- Outboard lap/sash seat belts with emergency locking retractor, inboard lap seat belt.
- Tilt telescopic adjustable steering column, soft feel urethane steering wheel.
- Easy entry grab handles on 'A' and 'B' pillars.
- Heater demister with 4 speed fan, 4 outlet vents to screen, 5 fascia outlets, 5 foot outlets.
- AM/FM radio with digital clock, dash mounted.
- High low ratio selector, and 4 wheel drive selector.

INSTRUMENTATION

- Speedometer, odometer and tachometer.
- Gauges for coolant temperature, fuel level and brake air pressure.
- Dash illumination control.

INDICATOR LAMPS

- Turn signals, parking brake on, high beam on, exhaust brake engaged, brake fluid level, four wheel drive engaged.

WARNING LAMPS

- With warning bulb check switch.
- Battery charge, oil filter clogged, oil pressure, low air pressure, brake system, air cleaner clogged, stop and tail lamp failure.

SWITCHES

- Left side combination switch for exhaust, brake wipers and washers.
- Hazard lamp switch.
- Right side combination switch for headlamps, turn signals and headlamp dip.
- Key operation for engine stop and start, external engine crank switch for service when cab is tilted.
- 24 Volt 2 pin accessory plug on centre fascia panel.
- Three way switch for interior lamp activated by driver and passenger doors.