

ISUZU FRR 550 S

LONG



ENGINE ISUZU 6HH1-S

- Type:** 6 cylinder, overhead camshaft, 4 stroke, direct injection, diesel.
- Bore x Stroke:** 115 mm x 132 mm.
- Displacement:** 8226 cc.
- Compression Ratio:** 18.5 : 1.
- Output - Power:** 150 kW @ 2850 RPM. (ISO 1585)
- Torque:** 539 Nm @ 1700 RPM. (ISO 1585)

CLUTCH

- Hydraulic control dry single plate. 352 mm (14") diameter.
- Asbestos free lining material. Total lining area (both sides) 1164 cm².

TRANSMISSION ISUZU MBJ6T



- 6 speed overdrive, constant mesh with synchromesh on gears 2-6. Oil capacity 5.3 litres.
 - Gear ratios (: 1)
- | | | | | | | |
|-------|-------|-------|-------|-------|-------|-------|
| 1st | 2nd | 3rd | 4th | 5th | 6th | Rev |
| 6.378 | 3.627 | 2.307 | 1.452 | 1.000 | 0.787 | 6.595 |
- Maximum geared speed 121 km/h
 - 2 piece propeller shaft, 90 mm diameter.

REAR AXLE ISUZU R077 CAPACITY 7700 KG

- Banjo type, fully floating, single reduction. Ratio 4.750 : 1.
- Hypoid type ring gear. 343 mm diameter. Oil capacity 5.5 litres.

BRAKES

- Air over hydraulic, dual circuit, front two leading, rear dual two leading.
- Drum diameter front and rear 320 mm. Total swept area 5127 cm².
- Air dryer.
- Asbestos free lining material.
- Spring park brake acting on rear wheels.

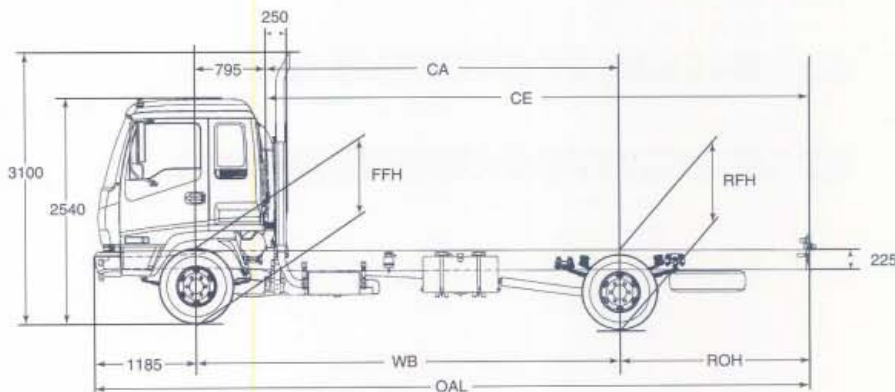

MODEL	WHEELBASE	GVM	GCM	ORDERING CODE
FRR 550 S LONG	4850mm	10000kg	16000kg	8FF02-271

KERB MASS (kg)*

	Front	Rear	Total
FRR 550 S LONG	2,140	1,040	3,180

*Estimated mass of chassis cab with oil, water and fuel tank containing 10 litres of fuel. Excluding spare wheel and tools.

DIMENSIONS (mm) *

	FRR 550 S LONG
Wheelbase (WB)	4,850
Overall Length (OAL)	8,170
Rear Overhang (ROH)	2,135
Cab To Axle (CA)	4,055
Cab To End Of Frame (CE)	6,190
Front Frame Height, Unladen (FFH)	790
Front Frame Height, Laden (FFH)	761
Rear Frame Height, Unladen (RFH)	900
Rear Frame Height, Laden (RFH)	835
Turning Circle (Kerb To Kerb)	14.9m
Nominal Max. Body Length*	6,560

*Except Turning Circle: metres. *Subject to weight distribution

ISUZU GENERAL MOTORS AUSTRALIA LTD. A.C.N. 009 962 272 (A 100,000 KILOMETER WARRANTY). Subject to the conditions of the Isuzu New Vehicle Warranty, every Isuzu Truck carries a warranty which covers (over the life of the truck) the first 24 months or 100,000 km (whichever comes first), 36 months or 150,000 km (whichever comes first), power train warranty runs concurrently with the new vehicle warranty, as does a 36-month (whichever comes first) corrosion warranty. PLEASE NOTE: as the purchaser of Isuzu means of constant product improvement, all parts, accessories and equipment are subject to change without notice. An Isuzu distributor (whichever distributor you purchase from) is authorised or permitted to give or make any statement, assertion or undertaking in relation to the quality, performance, characteristics, development or use of any Isuzu product or any Isuzu product or in connection with the supply of any Isuzu product which is in accordance with any written statement, promise or undertaking in any of these respects, given or made by Isuzu to the owners of Isuzu products. Every distributor is made to ensure that such distributors adequate stocks of service parts and are equipped to provide satisfactory service, but makes no promise, other than to make it as comprehensive and best as possible. However, over the time of printing some of the information contained here may have been changed and, some of the equipment shown is identified through this specification sheet may have been changed and is available at extra cost. And the right is reserved to make changes at any time without notice, in price, colour, materials, equipment and so on. Your Isuzu dealer has details and before ordering, you should ask him/her to bring you up to date.

ISUZU
RELIABILITY IS EVERYTHING

AIR CLEANER

- Donaldson 11" two stage with vertical air intake stack and rain head.

CHASSIS FRAME

- Parallel rail, ladder type channel section, cold riveted.
- Straight frame for easy body mounting. Frame width 840 mm.
- Side member dimensions: 225 mm x 70 mm x 6 mm.
- Frame reinforcement angle section 203 mm x 64 mm x 4.5 mm at back of cab.
- Material, HT540A high tensile, weldable steel

COOLING SYSTEM

- 6 blade plastic cooling fan 500 mm diameter with thermatic fan clutch.
- Corrugated fin radiator with fan shroud. Frontal area 3820 cm². Coolant capacity 23.3 litres.

ELECTRICAL SYSTEM

- Batteries - 2 x 12 volt / 65 amp/h, negative earth.
- Alternator - 24 volt / 40 amp.
- Starter motor - 24 volt / 4.5 kW.
- Rear stop and tail lamps and licence plate lamp with long leads for variable body mounting.

EXHAUST SYSTEM

- Horizontal exhaust muffler with vertical exhaust stack.
- Exhaust brake, air controlled.

FRONT AXLE ISUZU F036 CAPACITY 3600 KG

- Reverse Elliot I-beam type. King pin diameter 35 mm with cylindrical roller thrust bearing.

FRONT SUSPENSION

- Semi-elliptical, alloy steel tapered multi-leaf springs. Fully wrapped eye with greaseable shackles.
- **Length x Width x Thickness x No. leaves**
1200 mm x 70 mm x 10 mm x 8
- Hydraulic, double acting, telescopic shock absorbers.

FUEL SYSTEM

- In line plunger, Bosch 'ADS' type fuel injection pump with mechanical all speed governor. In line filter, see through water separator with drain cock. Single fuel tank, capacity 180 litres.

LUBRICATION SYSTEM

- Pressure feed lubrication with combination full flow and partial flow by-pass filter. Plate type oil cooler in water jacket., Oil capacity 13.5 litres including filter.

REAR SUSPENSION

- Semi-elliptical, alloy steel tapered multi-leaf springs. Fully wrapped eye with greaseable shackles.
- | | Length | x | Width | x | Thickness | x | No. leaves |
|-------|---------|---|-------|---|-----------|---|------------|
| Main: | 1300 mm | x | 70 mm | x | 11 mm | x | 8 |
| Aux: | 850 mm | x | 70 mm | x | 10 mm | x | 3 |
| | 850 mm | x | 70 mm | x | 11 mm | x | 4 |

STEERING

- Fully integral, power assisted, recirculating ball type.
- Gear ratio 16.1 ~ 18.8 : 1. Turns lock to lock 4.1.
- Gear driven vane type oil pump. Oil capacity 1.5 litres.

TOOLS

- Lockable tool box with 7000 kg capacity jack and wheel changing tools, tool kit.

WHEELS AND TYRES

- 6.00 x 17.5, 6 stud disc wheels, 225/90R17.5 - 14 ply tubeless tyres front and rear.
- Number of wheels and tyres 7, including spare. Winch type spare wheel carrier.

CAB EXTERIOR

- All steel cab with welded strengthening ribs and side door impact beams. Torsion bar assisted manual tilt to 45°.
- 4 silicon filled rubber cab isolators.
- Cation electrodeposition primer.
- Bumper bar with step holes and footplate.
- Halogen headlamps, hinged for easy bulb replacement. Park lamps and cab clearance lamps.
- Turn signal lamps in front bumper and doors.
- 2 speed wiper/washer with variable intermittent mode. Triple washer jets mounted on wiper arms.
- Tinted, laminated windshield; tinted, toughened side and rear glass.
- West Coast type rear view mirrors. Convex mirror surface on passenger side.
- Alloy non-slip cab entry steps.
- Lift up front access panel for clutch and windscreen washer fluids, cab air filter screen. Engine and brake fluid check points at rear of cab.

CAB INTERIOR

- Fully trimmed cab interior with cloth seat facings, formed roof lining. Overhead storage lockers. Driver and passenger sun visors.
- Pull out drinks holder in centre fascia, cigarette lighter with ash trays in doors.
- Driver's seat with mechanical suspension and 3 way lumbar support. Adjustment for seat back recline, seat slide and weight control.
- Outboard reclining passenger seat with under-seat storage drawer. Folding centre seat back with lockable compartment and tray.
- Outboard lap/sash seat belts with emergency locking retractors, centre lap seat belt.
- Tilt/telescopic adjustable steering column, soft feel urethane steering wheel.
- Easy entry grab handles on 'A' pillars.
- Heater demister with 4 speed fan, 4 outlet vents to screen, 5 fascia outlets, 5 foot outlets, demister ducts to door glass.
- AM/FM radio cassette with digital clock, dash mounted.
- DIN standard aperture in dash for CB radio.
- Park brake activation lever at left side of driver's seat.
- Rear vision mirror.
- Passenger side assist grip.
- Driver's left foot rest.
- Cab exhaust vents rear/upper cab.
- Business card clip. Coat hook at rear of cab.
- Elastic mesh pocket on driver's door.

INSTRUMENTATION

- Speedometer, odometer, trip meter and tachometer.
- Gauges for coolant temperature, fuel level and brake air pressure.

INDICATOR LAMPS

- Turn signals, parking brake on, high beam on, exhaust brake engaged.
- Reversing lamp and beeper.

WARNING LAMPS

- With warning bulb check switch.
- Battery charge, oil pressure, low air pressure, brake system, stop and tail light failure.

CONTROLS

- Left side combination stalk switch for exhaust brake, windscreen wipers and washer, hazard lamps..
- Right side combination stalk switch for headlamps, high beam and turn signals.
- Engine idle speed adjust control.
- Key operation for engine start and stop, external engine crank switch for service when cab is tilted.
- 3 way switch for interior lamp activated by driver and passenger doors.
- 24 volt-2 pin accessory plug in centre console.

FRR 550 S LONG

ISUZU

RELIABILITY IS EVERYTHING