

Model	NPS250/300 4x4
GVM	4,490/6,000kg
GCM	7,990/9,500kg
Engine Type:	Isuzu SiTEC 115
Displacement:	4,570 cc
Power*:	85 kW @ 3,200 RPM
Torque*:	291 Nm @ 1,600 RPM

250/300 ΔχΔ

Cab/Chassis specification as at July 2001

CABIN SPECIFICATIONS AND APPOINTMENTS

CABIN EXTERIOR

- All steel fixed cabin with manual tilting to 45°.
- Extended front wheel arch spray suppression quards
- 90° opening, internally reinforced front doors.
- Non slip, aluminium (upper) and steel (lower) cabin entry steps.
- "West Coast" type rear view mirrors. Flat mirror glass with additional, independently adjustable convex "spotter" mirror on both sides.
- Easy access to fluid check points.
- Tinted and laminated windshield.
- 2-speed windshield wiper system with intermittent wipe mode.
- Windshield washer system with triple washer jets on each wiper arm.
- Single-piece headlamps, incorporating turn signals
- Roof-mounted clearance lamps.

CABIN INTERIOR

- · Entry assist handles on 'A' pillars.
- Passenger side assist grip.
- Driver's bucket seat with reclining back and foreaft adjustment. 2-person passenger bench seat with split, folding seat backs. Seat cushion tilts for access to engine. Flat tray on back of centre and passenger seats. Paper clip on centre seat tray. Fire resistant cloth seat facings.

- 3-point, lap-sash seatbelts with emergency locking belt retractors in outboard seating positions. 2point lap seatbelt in centre seating position.
- Driver and passenger fold-down sun visors.
- Interior rear-vision mirror. ٠
- Full interior panel trim with padded roof lining and vinyl floor mats. Centre storage console.
- Windscreen header storage shelf.
- "Glove" compartment with door.
- "Soft feel" urethane steering wheel.
- Steering column with tilt and telescopic adjustment.
- Heater / Demister with 4-speed fan and windscreen, face and floor outlets.
- Optional fully integrated air conditioning.
- Fore-aft adjustable roof vent.
- Steering column with tilt and telescopic adjustment.
- AM / FM Stereo Radio / Cassette with integrated digital clock
- Optional 6 stack CD player.
- Centre fascia pull-out drinks holder.
- Easy access fuse panel (behind glove compartment door).
- Windshield washer reservoir under glove compartment.
- Centre fascia and driver's door ashtrays.
- Interior lamp with On / Door / Off switch, activated by either door.

CONTROLS

- Key-operated engine start / stop and steering lock. Engine fast-idle vernier. 2WD / 4WD selection switch.
- Transfer case ratio selection lever on LHS of steering column.
- Left Side Combination Stalk: Windshield wipers and washer; exhaust brake.
- Right Side Combination Stalk: Turn signals; position, main and high beam lamps. Hazard flash switch.
- Additional interior lamp switch on instrument panel adjacent to driver's door.

INSTRUMENTATION

- Gauges: Electronically driven speedometer and tachometer. Digital odometer with integrated, dual tripmeter. Engine coolant temperature and fuel level
- Warning Lamps: Low battery charge, brake failure, low fuel level, glow plug, water separator.
- Indicator Lamps: Turn signals, parking brake, high beam, exhaust brake, 4WD engaged.

TOOLS

- Chassis frame mounted spare wheel and tyre winch. Wheel changing tools including 5,000 kg capacity hydraulic jack. Hand tools in kit bag.
- Externally mounted tool box with foam insert to support jack.

ISUZU NEW TRUCK WARRANTIES

STANDARD TRUCKPOWER WARRANTY*		TRUCKPOWER EXTENDED WARRANTY OPTIONS*			
NEW VEHICLE	2 years	50,000km	- 3 years / 100,000km	4 years / 150,000km	5 years / 200,000km
DRIVETRAIN	3 years	100,000km			
CAB CORROSION	3 years	unlimited			

Subject to the conditions outlined in the I-GM New Vehicle Warranty, the Isuzu NPS models carry a standard factory warranty which covers the owner: (i) for the entire vehicle, for the first 24 months or 50,000km (whichever comes first) (ii) for the powertrain, which runs concurrently, for 36 months or 100,000km (whichever comes first) (iii) against cab corrosion, for 36 months and unlimited kilometres

A TruckPower Extended Warranty as illustrated is available by purchase to cover the owner against the failure of original components, but excludes some components and expendable items such as oil, filters, etc. Please consult with your Isuzu Dealer for full details obtainable from a dedicated brochure available to customers.



ISUZU-GENERAL MOTORS AUSTRALIA LTD A.C.N. 006 962 572. PLEASE NOTE: as the policy of I-GM is one of continual product improvement, all specifications and equipment are subject to change without notice. No I-GM dealer or other person is authorised or permitted to give or make any statement, assertion or undertaking in relation to the quality, performance, characteristics, descriptions or fitness for any purpose of any I-GM product or in connection with the supply of any I-GM product which is at variance with any written statement, assertion or undertaking in relation to the quality, performance, in many parts of Australia, for the sale of service, parts and the provision of service to the owners of I-GM products. Every endeavour is made to l-GM has franchised dealers in many parts of Australia, for the sale of service, parts and the provision of service to the owners of I-GM products. Every endeavour is made to ensure that such dealers carry adequate will be available or available at any specific location or at any particular time. A word about this specification sheet. We have tried to make it as comprehensive and factual as possible. However, since the time of printing some of the information you will lind here may have been updated. Also, some of the equipment shown or described through this specification sheet may have been changed and/or is available at tart cost. And the right is reserved to make thange been updated. Also, some of the equipment shown or described through this specification sheet may have been changed and/or is available at tart cost. And the right is reserved to make thanges at any time without notice, in prices, colours, materials, equipment and models. Your I-GM dealer has details and before ordering, you should ask him/her to bring you up to date.



NPS250/300 4x4

DRIVELINE SPECIFICATIONS

ENGINE: SITEC 115 (ISUZU 4HG1)

4 cylinder, 4 stroke, overhead camshaft, Type: direct injection diese

Bore x Stroke:	115 mm x 110 mm			
Displacement:	4,570 cc			
Compression Ratio:	19.0:1			
Output Power*:	85 kW @ 3,200 RPM			
Torque*:	291 Nm @ 1,600 RPM			
Emissions Standard: Euro 1/ADR 70				
* Engine performance to EEC 80/1269 (Nett).				

- Integral engine oil cooler.
- Separate full-flow and bypass engine oil filters. Bosch 'A' type fuel injection pump with 'RLD' all-speed
- governor. Quick-start glow plug cold starting aid. **COOLING SYSTEM**
- Pressurised cooling system. Tube and corrugated fin type radiator with 2,447 cm² frontal area.
- Welded steel mesh radiator brush guard 10-blade, plastic, 430 mm diameter cooling fan with ther-
- matic / viscous type clutch. **AIR INTAKE SYSTEM**
- Chassis mounted, cartridge type, 197 mm diameter air filter. Vertical air intake stack and resonator mounted at cabin rear.

CHASSIS SPECIFICATIONS

CHASSIS FRAME

- section rails with cold rivetted cross members forming ladder type frame
- Rail dimensions Web mm: 203 x 6.0
- Flanges mm: 65 x 6.0 Frame width: 750 mm

SUSPENSION

FRONT

- Alloy steel, multi-leaf springs with fully wrapped eye and metalastic bushes Nominal size: 1,200 mm x 70 mm
- Hydraulic double acting telescopic shock absorbers Stabiliser bar
- REAR
- Alloy steel, multileaf, two-stage springs. Fully wrapped main spring eyes with metalastic bushes.
- Nominal spring lengths: Main spring: 1,300 mm x 70 mm Auxiliary spring: 850 mm x 70 mm
- Hydraulic, double acting, telescopic shock absorbers.

EXHAUST SYSTEM

Horizontal exhaust silencer Chassis mounted, vertical exhaust stack FUEL SYSTEM

- Cylindrical, steel fuel tank with 115 litre liquid capacity and 10 litre expansion space. Total: 125L
- Fuel / water separator with warning lamp. Single stage fuel filter

CLUTCH

- Hydraulically actuated, 300 mm diameter, dry single plate with 8 coil cushioning springs, single diaphragm pressure spring. Asbestos free clutch lining material. Total lining area 847 cm²
- Automatic clutch adjuster.

TRANSMISSION: ISUZU MXA-5R:

- 5 forward speeds including overdrive, 1 reverse speed, synchromesh on all gears. P.T.O. opening left hand side.
- Gear Batios 1st 2nd 3rd 4th 5th Rev 4.987:1 2.870:1 1.594:1 Direct 0.728:1 4.774:1
- 2-speed transfer case integral with transmission. Electrovacuum 2WD / 4WD selection and lever / cable operated ratio selection mechanisms. Transfer Case Ratios Low: 1.868:1 High: Direct

- . Maximum Geared Speed: 111 km/h @ 3.400 RPM
- 2-piece rear propeller shaft with 82.6 mm tube diameter. •
- Single piece forward propeller shaft with 82.6 mm tube diameter and Hookes type constant velocity universal joint.

FRONT AXLE: ISUZU F026

- Banjo type housing with full floating drive shafts and ٠ Birfield type constant velocity steering joints. Remote high mount axle breather. Free-wheeling, manual locking type hubs.
- Rated capacity: 2.600kg

REAR AXLE: ISUZU R040

- Banjo type with full floating axle shafts. Remote, high mount axle breather.
- Axle tube size: 106 mm x 106 mm x 6 mm
- Rated capacity: 4 000 kg
- Single reduction, hypoid gearing with 292 mm ring gear and viscous type limited slip, 4-pinion differential. Drive ratio: 6.142:1

BRAKES

- Front and rear drum brakes with dual circuit hydraulic control, vacuum assistance and load sensing proportioning valve. Front Drum Diameter: 320 mm Rear Drum Diameter: 320 mm
- Slave cylinder / shoe types: Front: Dual two leading, manual adjust.
- Asbestos free brake linings Lining size (per wheel end):
- exhaust brake.
- lever floor-mounted LHS of drivers seat.

- Gear ratio: 20.9:1
- Turns lock to lock: 3.7

WHEELS AND TYRES


- 6.00GS x 16 JIS 6 stud disc wheels •
- 7.50R16LT 10 P.R. Olympic Steeltrek tyres.
- Total of 7 wheels and tyres supplied including 1 spare wheel and tyre assembly.

ELECTRICAL SYSTEM

- Batteries: 2 x 12 Volt / 65 Amp-Hour batteries in series for 24 Volt, negative ground system.
- Alternator: Hitachi 24 Volt / 50 Amp brushless type. Starting Motor: Hitachi 24 Volt / 4 0 kW reduction geared
- type.
- Rear brake, turn, reverse and marker lamp assemblies and rear registration plate lamp with additional wiring lengths. Reversing alarm

TOWING 750kg (Unbraked trailer) **MODEL RATINGS AND DIMENSIONS** CAPACITY 3,500kg (Braked trailer) **DIMENSIONS (mm)** MODELS RATINGS TARE MASS# TURNING GVM GCM TOTAL FRONT REAR ΟΔΙ FOH ROH CΔ CE CW FFH RFH WR CH KERB TO KERE LADEN I ADEN NPS250 4x4 4,490kg 7.990kg 1,750kg 880kg 2,630kg 3.400 5.955 1,060 1,495 2.660 3.720 1.995 2,470 935 825 14.0m 6,000kg 9,500kg NPS300 4x4

*Estimated mass of cab/chassis with oil, water and fuel tank containing 10 litres of fuel and including spare wheel and tools

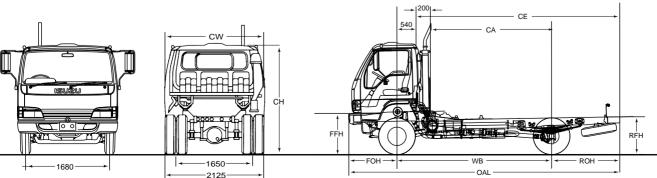

- Rear: Dual two leading, manual adjust.
- Front: 2 x 307 mm x 75 mm x 9.6 mm Rear: 2 x 335 mm x 100 mm x 11.0 mm
- Electro-vacuum controlled, butterfly type, 70 mm diameter
- Drum parking brake on transmission output shaft. Control

STEERING

Integral power assisted, recirculating ball type steering. Lube-for-life drag link. Gear driven, vane type oil pump.