



ISUZU SCR 370

GMH MODEL: FSR 12FX

ORDERING CODE: 8DL 02.

STANDARD GVM 10500 kg

STANDARD GCM 15000 kg

TARE MASS (approx) 3110 kg

DRIVELINE SPECIFICATION

ENGINE

Model: ISUZU 6BG1
 Type: 6 cylinder OHV Diesel
 Displacement: 6494cc
 Max power: 120kW @ 2900 rpm
 Max torque: 431 Nm @ 1800 rpm
 Bore & Stroke 105x125mm
 Compression ratio: 170:1
 RAC Rating: 41.0

TRANSMISSION

Model: ISUZU MBG 6R
 Type: 6-speed overdrive
 1st 6.890
 2nd 3.918
 3rd 2.419
 4th 1.466
 5th 1.000
 6th 0.781
 Rev 6.304

AXLE, FRONT

Type: Reverse Elliot I beam
 Capacity: 3400 kg

AXLE, REAR

Type: Banjo fully floating
 Capacity: 7700 kg
 Ratio: 5.857:1

BRAKES

Air over hydraulic



WHEELBASE

3700mm

CHASSIS RATINGS

GROSS VEHICLE and GROSS COMBINATION MASS RATING (KG):			Estimated kerb mass (chassis and cab with oil, water and full fuel tank), (kg).		
GVM 10500	GCM 15000	Tyres 8.25 x 20 12 ply	Front 1900	Rear 1265	Total 3165

DIMENSIONS

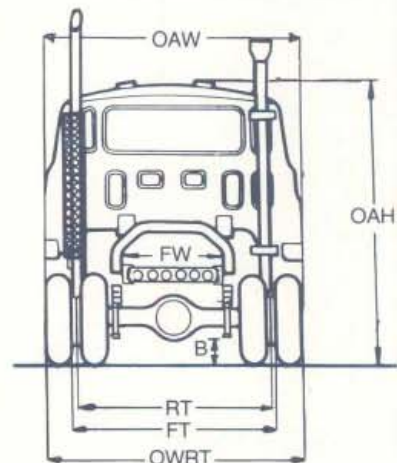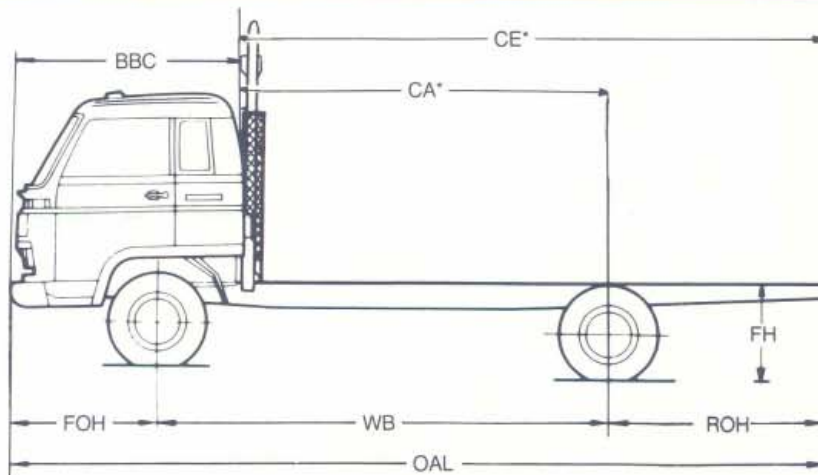

LENGTHS

		(mm)
Overall length	OAL	6510
Wheelbase	WB	3700
Cab to axle	CA*	3000
Cab to end of frame	CE*	4600
Front Overhang	FOH	1210
Rear Overhang	ROH	1600
Bumper to back of cab	BBC	1910

HEIGHTS

Overall height	OAH	2420
Ground to top of frame	FH	940
Rear axle clearance	AH	270

TURNING CIRCLE

Kerb to kerb	(m)	14.6
Wall to wall		16.2

*CA & CE dimensions are effectively reduced by 300mm with the fitment of vertical exhaust pipe and protector

WIDTHS

Overall width	OAW	2170
Frame width	FW	800
Front track	FT	1710
Rear track	RT	1630
Outside width rear tyres	OWRT	2165



ISUZU
 Reliability is everything.

ISUZU SCR 370

CAB/CHASSIS COMPONENT SPECIFICATIONS

AXLE, FRONT

Type: Reverse Elliot I beam
Capacity: 3400 kg

AXLE, REAR

Type: Banjo fully floating
Capacity: 7700 kg
Ratio: 5.857:1
Final Gear: 343mm diameter, Hypoid

BRAKES, SERVICE

Type: Air over hydraulic dual circuit, front two leading, rear dual two leading. Exhaust brake.
Total lining area: 3410cm²
Brake drum diameter: 370mm

BRAKE, PARKING

Type: Mechanical expanding at rear of transmission.

CABIN EXTERIOR

All steel tilt cab with laminated windshield. 2 speed windshield wiper/washer with intermittent setting. West-coast type rear view mirrors. Dual round sealed beam headlamps. Foglamps Vertical air intake stack. General hand tools and 7000kg capacity jack. Spare wheel and tyre.

INTERIOR

Adjustable Driver's suspension seat. Adjustable roof vents. Rear side vent windows. Passenger bucket seat and second passenger centre seat which lifts up for coolant and oil check. AM Radio. Heater/demister with 4 speed fan. Driver and passenger sunvisors.

INSTRUMENTATION

Speedometer and odometer. Tachometer. GAUGES for engine temperature, brake air pressure and fuel level. INDICATOR LAMPS for turn indicators, headlamp high beam, exhaust brake on and park brake on. WARNING LAMPS for low brake fluid, low brake air pressure, battery charge, clogged air filter, oil pressure. Left side combination switch for exhaust brake & two speed wipers with intermittent setting. Hazard warning switch. Fog lamp switch. Right combination switch for headlamps, turn signal and headlamp dip. Key operation auto engine stop.

CLUTCH

Type: Hydraulic control. Dry single plate.
Size: 325mm diameter

ENGINE SPECIFICATION

Type: 6 cylinder OHV diesel
Displacement: 6494cc
Max. Power: 120 kW @ 2900 rpm
Max torque: 431 Nm @ 1800 rpm
Bore and Stroke: 105 x 125 mm
Compression ratio: 17.0:1
RAC rating: 41.0

YOUR GMH ISUZU DEALER:

LUBRICATION

Pressure feed with full flow paper element filter. Capacity 13.5 litres including filter.

COOLING

Heavy duty radiator.
Size: 622 x 559 x 53 mm
Frontal area: 0.348m²

AIR CLEANER

Paper element, Donaldson 11" Vertical air intake stack.

FUEL SYSTEM

Fuel injection pump: In line plunger Bosch X with mechanical governor.
Pre-fuel filter.

Fuel tank capacity: 160 litre.

ELECTRICAL SYSTEMS

Batteries: 2 x 12V-53A/H
Alternator: 24V-25A
Starter: 24V-4.5kW

FRAME

Type: Ladder type channel section
Side member dimensions: 225 x 70 x 6mm.
Frame reinforcement at: Cab back-203 x 64 x 4.5 mm
Angle Section.

Rear axle-213 x 64 x 3.2 mm Channel Section

STEERING

Type: Power assisted recirculating ball.
Gear ratio: 22.4:1

SUSPENSION, FRONT

Type: Semi-elliptical alloy steel leaf springs
Size: (Length x width x thickness mm-no. of leaves)
1200 x 70 x 10-8

Shock absorbers: Hydraulic double acting telescopic

SUSPENSION, REAR

Type: Semi-elliptical alloy steel leaf springs
Size: (Length x width x thickness mm-no. of leaves)
Main: 1300 x 70-8

Auxiliary: 850 x 70 x 10-7

TRANSMISSION

Type: Isuzu 6 speed Overdrive
Gear ratios (to 1)
1st 6.890 2nd 3.918 3rd 2.419 4th 1.466
5th 1.000 6th 0.781 Rev 6.304

TYRES AND WHEELS

Tyre size: 8.25 x 20-12 ply.
Wheel type and size 6.50T x 20, 8 stud disc wheels.

GMH 12/20 WARRANTY

Every Isuzu is covered by the GMH warranty which covers the vehicle for the first 12 months or 20,000 kilometres.

Major engine components and driveline components have additional extended warranty. Please consult your GMH/ISUZU dealer for complete and accurate details.

PLEASE NOTE: As the policy of General Motors-Holden's is one of continual product improvement, all specifications and equipment are subject to change without notice. Bodies illustrated are not standard.

No GMH Dealer or other person is authorised or permitted to give or make any statement or undertaking in relation to the quality performance characteristics descriptions or fitness for any purpose of any GMH product or in connection with the supply of any GMH product, which is at variance with any written statement assertion or undertaking on any of these subjects given or made by General Motors-Holden's Limited or General Motors-Holden's Sales Pty. Ltd. in its published sales literature, and neither company accepts any liability for any such unauthorised action.

General Motors-Holden's Limited and General Motors-Holden's Sales Pty. Ltd. have franchised dealers in many parts of Australia for the sale of service parts and the provision of service to owners of GMH's products. Every endeavour is made to ensure that such dealers carry adequate stocks of service parts, and are equipped to provide satisfactory service, but neither General Motors-Holden's Ltd. nor General Motors-Holden's Sales Pty. Ltd. makes any promise, other than that contained in the New Vehicle Warranty given by General Motors-Holden's Sales Pty. Ltd., that such parts or service facilities will be available, or available at any specific location or any particular time.

General Motors Holden's Sales Pty. Ltd.



Reliability is everything.