



# ISUZU FVR 13 NRA

Model Designation: FVR 13 NRA

Ordering Code: 8EU02

## CHASSIS CAPACITY INFORMATION

Max. GCM:	24000 kg	Max. Rec. Body Width:	2500 mm
Max. GVM:	15000 kg	Max Geared Speed:	102 km/h
Kerb Mass (est.):	4880 kg		
Avail. for body & load	10120 kg		

## DRIVELINE SPECIFICATION

ENGINE	TRANSMISSION	AXLES	WHEELS/TYRES
Model: ISUZU 6SA1 Type: 6 cylinder OHC diesel Bore & Stroke: 115 x 135mm Displacement: 8413cc Max power (Nett): 135kW @ 2600 rpm (DIN) Max torque (Nett): 560 Nm @ 1400 rpm (DIN) Compression ratio: 16.5:1 RAC Rating: 49.2	Model: ISUZU MLD7R Type: 7 speed overdrive Gear ratios (to 1) 1st 8.181 2nd 5.167 3rd 3.333 4th 2.105 5th 1.347 6th 1.000 7th 0.863 Rev 8.307	<b>AXLE FRONT</b> Type: Reverse Elliot I beam Capacity: 6,000 kg  <b>AXLE REAR</b> Type: Banjo, fully floating  Capacity: 10,500 kg Ratio: 5.571:1	8.25T x 22.5 10 stud disc wheels 11.00R 22.5 - 16 ply radial tyres.  <b>BRAKES</b> Air/Hydraulic

## DIMENSIONS


### ESTIMATED KERB MASS:

Front:	2770 kg
Rear:	2110 kg
* Total:	4880 kg

### TURNING CIRCLE: (m)

Kerb to kerb	19.3
Wall to wall	20.4

\* chassis/cab with oil, water and fuel tank containing 10 litres.

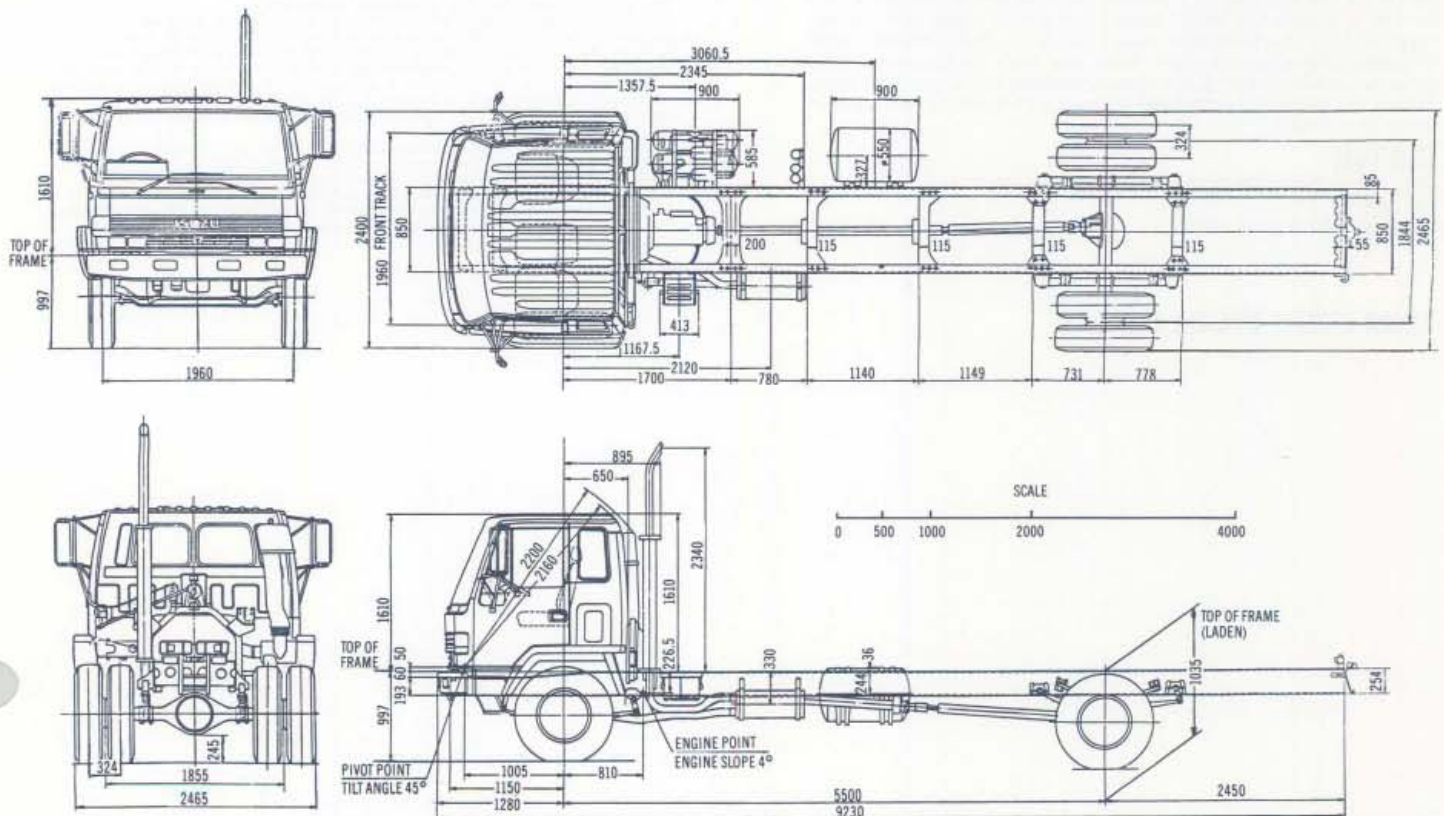

# ISUZU FVR 13 NRA

## CAB/CHASSIS COMPONENT

### AXLE FRONT

Type: Reverse Elliot I beam  
Capacity: 6000 kg. Toe in: 0°

### AXLE REAR

Type: Banjo, fully floating  
Capacity: 10,500 kg  
Ratio: 5.571:1  
Final Gear: 420mm diameter Hypoid

### BRAKES, SERVICE

Type: Air over hydraulic dual circuit, front and rear leading - trailing type.  
Total lining area: 5,299cm<sup>2</sup>  
Brake drum diam: 410mm front and rear  
Brake lining: 140 (w) x 414 (l) x 16 (t) mm front  
180 (w) x 414 (l) x 16 (t) mm rear  
Compressor: Gear driven at half engine speed

### BRAKE, AUXILIARY

Exhaust brake

### BRAKE, PARKING

Type: Spring park brake acting on rear wheels

### CABIN

#### EXTERIOR

All steel tilt cab  Cation electro deposition primer  Manual tilt  Laminated windshield  2 speed wiper with intermittent function and washer  West Coast type rear view mirrors  Dual square Halogen headlamps  Fog lamps  Combination turn and park lamps  Corrosion resistant cabin entry steps  Vertical air intake stack  Tool kit with 10,000 kg capacity jack  Access to engine fluid checks without cab tilt operation

#### INTERIOR

Seats: Driver - Air suspension, reclining with seat slide, height control and lumbar support. Centre - Folding, with console. LH - Reclining  Seat material: vinyl  Tilt/telescopic steering column  Side vent windows  AM radio  Heater/Demister with 4 speed fan Outlets to screen (4) Chest level (3) Drivers face level (2) Floor level (2)  Park brake activation lever beside drivers seat  Engine cover mounted gearshift lever  Driver and passenger sunvisors  Moulded roof lining  Overhead parcel shelf

#### INSTRUMENTATION

GAUGES - Speedometer with odometer, tachometer, water temperature, fuel lever and brake air pressure  INDICATOR LAMPS: Turning indicators, headlamp high beam, exhaust brake on and park brake engaged  WARNING LAMPS: Low brake fluid, clogged air filter, low brake air pressure, stop/tail light failure, low oil pressure, clogged water separator, clogged engine oil filter and low battery charge  SWITCHES: Left side combination switch for exhaust brake, wipers and washer. Hazard lamp switch. Fog lamp switch. Right combination switch for headlamps, turn signals and headlamp dip. Key operation for engine start and stop. Externally mounted switch for engine turnover with cab tilted (mounted on rear RH cab mount).

### CLUTCH

Type: Hydraulic control. Dry single plate with cushioning springs and air servo  
Size: 380mm  
Lining area: 1363cm<sup>2</sup> (both sides)

### LUBRICATION

Pressure feed with full flow paper element filter, oil cooler  
Capacity 13.5 litres, including filters.

### COOLING

Thermatic type 6 blade fan  
Size: 475mm  
Radiator type: Tube and corrugated fin, pressure type  
Size: 622h x 559w x 7lt (mm)  
Frontal area: 0.348m<sup>2</sup> with bell mouth fan shroud

### AIR CLEANER

Paper element, double stage, Donaldson 11" type. Vertical air intake stack with rain head

### FUEL SYSTEM

Injection pump: In line plunger, Bosch 'AD' type with mechanical all speed governor.  
Filters: In line paper filter, water separator with drain cock  
Fuel tank capacity: 200 litres, (cylindrical)

### ELECTRICAL SYSTEM

Batteries: 2 x 12V 53A/H  
Alternator: 24V - 40A  
Starter: 24V - 5.5 kW  
Dash mounted fuse box

### EXHAUST SYSTEM

Type: Vertical pipe

### FRAME

Type: Ladder type channel section  
Side member dimensions: 254 x 85 x 8mm  
Frame reinforcement: At cab back: 224 x 77 x 4.5 angle section  
Frame material: Low carbon steel, weldable

### STEERING

Type: Fully integral, power assisted recirculating ball with gear driven hydraulic pump  
Gear ratio: 22.4:1

### SUSPENSION, FRONT

Type: semi-elliptical, alloy steel taper leaf spring with stabilizer  
Size: 1470 x 80 x 20 x 1 leaf  
1470 x 80 x 22 x 2 leaves

Shock absorbers: Hydraulic, double acting, telescopic

### SUSPENSION, REAR

Type: Semi-elliptical, alloy steel multi leaf springs with stabilizer  
Size: main: 1420 x 100 x 12mm x 8 leaves  
auxiliary: 980 x 100 x 10mm x 2 leaves  
980 x 100 x 11mm x 4 leaves

### TYRES AND WHEELS

Tyre size: 11.00 R 22.5 - 16 Ply Radial  
Wheel type and size: 8.25T x 22.5, 10 stud disc.  
No. of wheels: 7 (incl. spare)  
Tread pattern: Rib.

#### HOLDEN'S 12/20 WARRANTY

PLEASE NOTE: Every Isuzu is covered by the Holden's warranty which covers the vehicle for the first 12 months or 20,000 kilometres.

Major engine components and driveline components have additional extended warranty.

Please consult your Holden's/Isuzu dealer for complete and accurate details.

PLEASE NOTE: As the policy of Holden's Motor Company is one of continual product improvement, all specifications and equipment are subject to change without notice. Bodies illustrated are not standard.

No Holden's Dealer or other person is authorised or permitted to give or make any statement assertion or undertaking in relation to the quality performance characteristics descriptions of fitness for any purpose of any Holden's product or in connection with the supply of any Holden's product, which is at variance with any written statement assertion or undertaking on any of these subjects given or made by Holden's Motor Company or General Motors-Holden's Sales Pty. Ltd. in its published sales literature, and neither company accepts any liability for any such unauthorised action.

Holden's Motor Company and General Motors-Holden's Sales Pty. Ltd. have franchised dealers in many parts of Australia for the sale of service parts and the provision of service to owners of Holden's products. Every endeavour is made to ensure that such dealers carry adequate stocks of service parts, and are equipped to provide satisfactory service, but neither Holden's Motor Company nor General Motors-Holden's Sales Pty. Ltd. makes any promise, other than that contained in the New Vehicle Warranty given by Holden's Motor Company Ltd., that such parts or service facilities will be available, or available at any specific location or any particular time. General Motors-Holden's Sales Pty. Ltd.

## YOUR ISUZU TRUCK DEALER



# ISUZU

Reliability is Everything