



ENGINE ISUZU 6HH1-S

Type:	6 cylinder, overhead camshaft, four stroke, direct injection, diesel.
Bore x Stroke:	115 mm x 132 mm.
Displacement:	8226 cc.
Compression Ratio:	18.5 : 1.
Output - Power:	150 kW @ 2850 RPM. (ISO 1585)
Torque:	539 Nm @ 1700 RPM. (ISO 1585)

COOLING SYSTEM

- 6 blade plastic cooling fan 500 mm diameter with thermatic fan clutch.
- Corrugated fin radiator with fan shroud. Frontal area 3820 cm². Coolant capacity 23.3 litres.

CLUTCH

- Hydraulic control dry single plate. 355 mm (14") diameter.
- Asbestos free lining material. Total lining area (both sides) 1164cm².

TRANSMISSION: ISUZU MLD6D

- 6 speed direct drive, constant mesh with synchromesh on gears 2-6. Oil capacity 6.5 litres.
 - Pneumatic gearshift assistance.
 - Air assisted gearshift.
 - Gear ratios (: 1)
- | | | | | | | |
|-------|-------|-------|-------|-------|-------|-------|
| 1st | 2nd | 3rd | 4th | 5th | 6th | Rev |
| 7.166 | 4.526 | 2.919 | 1.954 | 1.254 | 1.000 | 7.276 |
- Maximum geared speed 96 km/h.
 - Two speed transfer case, electric/air shift control, oil to air oil cooler.
 - Ratios (: 1) High 1.000, Low 2.091. Oil capacity: 3.0 litres.
 - 3 piece propeller shaft, 90 mm diameter.

REAR AXLE: ISUZU R092 CAPACITY 9200 KG

- Banjo type, fully floating, No-Spin differential lock. Ratio 5.57 : 1.
- Hypoid type ring gear, 398 mm diameter. Oil capacity 8.0 litres.

FRONT AXLE ISUZU FD047 CAPACITY 4700 KG

- Banjo type, fully floating with Birfield type steering ball joint. Ratio: 5.57 : 1
- Spiral bevel type ring gear, 365 mm diameter. Oil capacity 5.5 litres.

BRAKES

- Air over hydraulic, dual circuit, front two leading, rear dual two leading. Drum diameter front 400 mm, rear 410 mm. Total swept area 6497 cm².
- Air dryer.
- Asbestos free lining material.
- Spring park brake acting on rear wheels.

AIR INTAKE SYSTEM

- Donaldson 11" two stage with vertical air intake stack and rain head.

ELECTRICAL SYSTEM

- Batteries - 2 x 12 volt / 65 amp/h, negative earth.
- Alternator - 24 volt / 40 amp.
- Starter motor - 24 volt / 4.5 kW.
- Rear stop and tail lamps and licence plate lamp with long leads for variable body mounting.

EXHAUST SYSTEM

- Horizontal exhaust muffler with vertical exhaust stack.
- Exhaust brake, air controlled.

FUEL SYSTEM

- In line plunger, Bosch 'ADS' type fuel injection pump with mechanical all speed governor. In line filter, see through water separator with drain cock. Single fuel tank, capacity 180 litres.

STEERING

- Fully integral, power assisted, recirculating ball type.
- Gear ratio 22.4 : 1. Turns lock to lock 3.5.
- Gear driven vane type oil pump. Oil capacity 2.5 litres.

SUSPENSION

FRONT

- Semi-elliptical, alloy steel tapered multi-leaf springs. Fully wrapped eye with greaseable shackles.
 - Length x Width x Thickness x No. leaves
- | | | | | | | |
|---------|---|-------|---|-------|---|---|
| 1470 mm | x | 80 mm | x | 12 mm | x | 3 |
| 80 mm | x | 13 mm | x | 5 | | |
| 80 mm | x | 18 mm | x | 1 | | |
- Hydraulic, double acting, telescopic shock absorbers.

REAR

- Semi-elliptical, alloy steel tapered multi-leaf springs. Fully wrapped eye with greaseable shackles.
 - Length x Width x Thickness x No. leaves
- | | | | | | | |
|---------------|---|-------|---|-------|---|---|
| Main: 1420 mm | x | 80 mm | x | 12 mm | x | 1 |
| | | 80 mm | x | 13 mm | x | 6 |
| Aux: 1000 mm | x | 80 mm | x | 12 mm | x | 9 |

WHEELS AND TYRES

WHEELS

- 7.00T x 20, 8 stud disc wheels, Michelin XZY 9.00R20 tubed type radial ply tyres front and rear.

TYRES

- Number of wheels and tyres 7, including spare. Winch type spare wheel carrier.

CHASSIS FRAME

- Parallel rail, ladder type channel section, cold riveted.
- Straight frame for easy body mounting. Frame width 850 mm.
- Side member dimensions: 253 mm x 80 mm x 7.5 mm.
- Frame reinforcement 240 mm x 72.5 mm x 4.5 mm angle section.
- Material, HT540A, weldable high tensile steel

LUBRICATION SYSTEM

- Pressure feed lubrication with combination full flow and partial flow by-pass filter. Plate type oil cooler in water jacket. Oil capacity 13.5 litres including filter.

CAB EXTERIOR

- All steel cab with welded strengthening ribs and side door impact beams. Torsion bar assisted manual tilt to 45°.
- 4 silicon filled rubber cab isolators.
- Cation electrodeposition primer.
- Bumper bar with step holes and footplate.
- Halogen headlamps, hinged for easy bulb replacement. Park lamps and cab clearance lamps.
- Turn signal lamps in front bumper and over wheel arches.
- 2 speed wiper/washer with variable intermittent mode. Triple washer jets mounted on wiper arms.
- Tinted, laminated windscreen; tinted, toughened side and rear glass.
- West Coast type rear view mirrors.
- Alloy non-slip cab entry steps.
- Lift up front access panel for clutch and windscreen washer fluids, cab air filter screen. Engine and brake fluid check points at rear of cab.

CAB INTERIOR

- Fully trimmed cab interior with cloth seat facings, formed roof lining. Overhead storage lockers. Driver and passenger sun visors.
- Pull out drinks holder in centre fascia, cigarette lighter with ash trays in doors.
- Driver's seat with mechanical suspension and 3 way lumbar support. Adjustment for seat back recline, seat slide and weight control.
- Outboard reclining passenger seat with under-seat storage drawer. Folding centre seat back with lockable compartment and tray.
- Outboard lap/sash seat belts with emergency locking retractors, centre lap seat belt.
- Tilt/telescopic adjustable steering column, soft feel urethane steering wheel.
- Easy entry grab handles on 'A' and 'B' pillars.
- Heater demister with 4 speed fan, 4 outlet vents to screen, 5 fascia outlets, 5 foot outlets, demister ducts to door glass.
- AM/FM radio cassette with digital clock, dash mounted.
- DIN standard aperture in dash for CB radio.
- Park brake activation lever at left side of driver's seat.
- Rear vision mirror.
- Passenger side assist grip.
- Driver's left foot rest.
- Cab exhaust vents rear/upper cab.
- Business card clip. Coat hook at rear of cab.
- Elastic mesh pocket on driver's door.

CONTROLS

- Left side combination stalk switch for exhaust brake, windscreen wipers and washer, hazard lamps.
- Right side combination stalk switch for headlamps, high beam and turn signals.
- Dash mounted switches for Transfer Case (4WD Engage and High/Low Range) control.
- Engine idle speed adjust control.

- Key operation for engine start and stop, external engine crank switch for service when cab is tilted.
- 3 way switch for interior lamp activated by driver and passenger doors.
- 24 volt-2 pin accessory plug in centre console.

INSTRUMENTATION

- Speedometer, odometer, trip meter and tachometer.
- Gauges for coolant temperature, fuel level and brake air pressure.

INDICATOR LAMPS

- Turn signals, parking brake on, high beam on, exhaust brake engaged.
- High/Low ratio engaged, Transfer Case (4WD) engaged.
- Reversing lamp and beeper.

WARNING LAMPS

- With warning bulb check switch.
- Battery charge, oil pressure, low air pressure, brake system, stop and tail light failure.

TOOLS

- Lockable tool box with 10,000 kg capacity jack and wheel changing tools, tool kit.

MODELS, CODES & RATINGS

MODEL	WHEELBASE	GVM	GCM	ORDERING CODE
FTS 750 4x4	4250mm	13000kg	*18000/ 20500kg	8FP02-571

*18000kg off road, 20500kg on road

KERB MASS* (kg)



	Front	Rear	Total
FTS 750 4x4	2,900	1,760	4,660

*Estimated mass of chassis cab with oil, water and fuel tank containing 10 litres of fuel. Excluding spare wheel and tools.

DIMENSIONS (mm)

	FTS 750 4x4
WB Wheelbase	4,250
OAL Overall Length	7,420
ROH Rear Overhang	1,900
CA Cab To Axle	3,535
CE Cab To End Of Frame	5,435
FFH Front Frame Height, Unladen	1,089
FFH Front Frame Height, Laden	1,060
RFH Rear Frame Height, Unladen	1,169
RFH Rear Frame Height, Laden	1,040
Turning Circle (Kerb To Kerb)	17.7m
Nominal Max. Body Length*	5,645

*Except Turning Circle: metres. *Subject to weight distribution

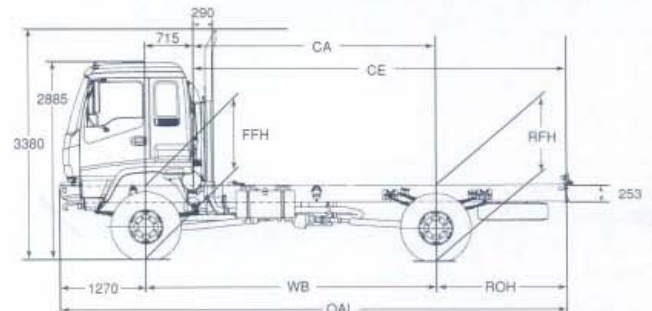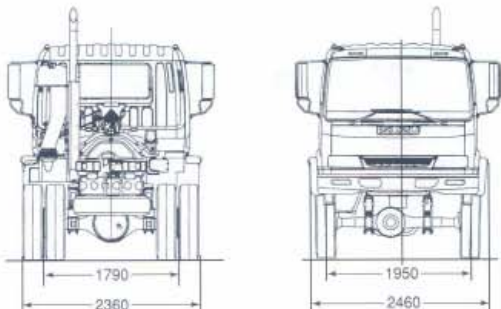

FTS750 4X4

ISUZU

RELIABILITY IS EVERYTHING