

ISUZU FSS 550

4X4/CREW



ENGINE ISUZU 6HH1-S

- Type:** 6 cylinder, overhead camshaft, four stroke, direct injection, diesel.
- Bore x Stroke:** 115 mm x 132 mm.
- Displacement:** 8226 cc.
- Compression Ratio:** 18.5 : 1.
- Output - Power:** 150 kW @ 2850 RPM. (ISO 1585)
- Torque:** 539 Nm @ 1700 RPM. (ISO 1585)

CLUTCH

- Hydraulic control dry single plate. 352 mm (14") diameter.
- Asbestos free lining material. Total lining area (both sides) 1164cm².

TRANSMISSION ISUZU MBJ5J

- 5 speed direct drive, constant mesh with synchromesh on gears 2-5. Oil capacity 4.4 litres.
- Gear ratios (: 1)

1st	2nd	3rd	4th	5th	Rev
6.378	3.627	2.307	1.452	1.000	6.595



- Maximum geared speed 98 km/h
- Two speed transfer case, electric/air shift control, oil to air oil cooler.
- Ratios (: 1) High 1.000, Low 2.091. Oil capacity: 3.0 litres.
- 3 piece propeller shaft, 90 mm diameter.

REAR AXLE ISUZU R065 CAPACITY 6500 KG

- Banjo type, fully floating, No-Spin differential lock. Ratio 5.125 : 1.
- Hypoid type ring gear, 365 mm diameter. Oil capacity 6.5 litres.

BRAKES

- Air over hydraulic, dual circuit, front two leading, rear dual two leading. Drum diameter front 400 mm, rear 410 mm. Total swept area 5853cm².
- Air dryer.
- Asbestos free lining material.
- Spring park brake acting on rear wheels.

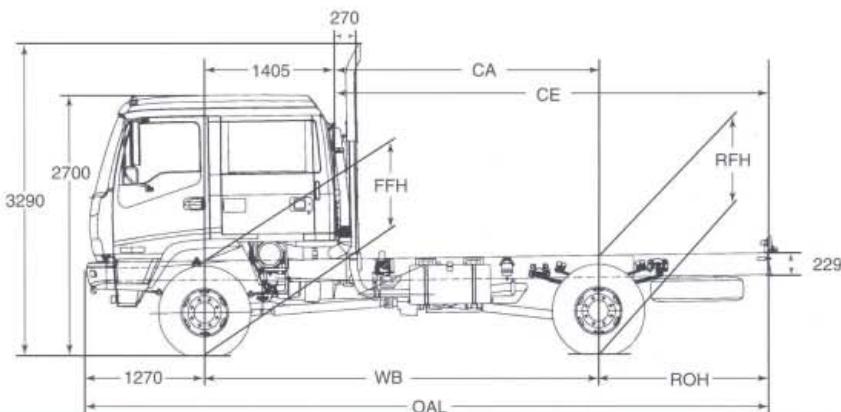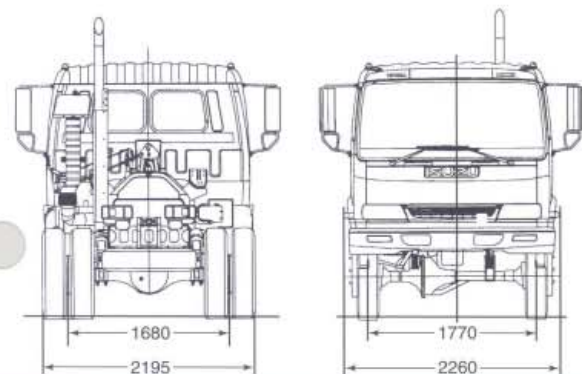

MODEL	WHEELBASE	GVM	GCM	ORDERING CODE
FSS 550 CREW	4200mm	10000kg	15000kg	8FN03-571

KERB MASS (kg)*

	Front	Rear	Total
FSS 550 CREW	2,660	1,505	4,165

*Estimated mass of chassis cab with oil, water and fuel tank containing 10 litres of fuel. Excluding spare wheel and tools.

DIMENSIONS (mm) *

	FSS 550 CREW
Wheelbase (WB)	4,200
Overall Length (OAL)	7,270
Rear Overhang (ROH)	1,800
Cab To Axle (CA)	2,795
Cab To End Of Frame (CE)	4,595
Front Frame Height, Unladen (FFH)	980
Front Frame Height, Laden (FFLH)	950
Rear Frame Height, Unladen (RFH)	1037
Rear Frame Height, Laden (RFLH)	910
Turning Circle (Kerb To Kerb)	17.2m
Nominal Max. Body Length*	4695

*Except Turning Circle: metres. *Subject to weight distribution

ISUZU GENERAL MOTORS AUSTRALIA LTD. A.C. N. 001 902 721 93 (00 000) WARRANTY. Subject to the conditions of the IGM New Vehicle Warranty, every Isuzu Truck carries a warranty, which covers your vehicle for the first 33 months or 100,000 kms (whichever comes first), 3-36 months or 1,000,000 kms (whichever comes first), power train (engine and transmission) only, with the new vehicle warranty. It does a 36 months unlimited kilometers (all countries) warranty. IGM SMC (S.M.C.P.) at the policy of IGM is one of the most important product improvement, all specifications and equipment are subject to change without notice. Any such alteration is not an obligation. No IGM dealer or other person is authorized or permitted to give or make any statement, assertion or undertaking in relation to the quality, performance characteristics, description or fitness for any purpose of any IGM product or in connection with the supply of any IGM product which is a variation with any written statement, assertion or undertaking on any of these subjects given or made to IGM or its published sales literature, and the company accepts no liability for any such statement or assertion. IGM has franchisee dealers in many parts of Australia, for the sale of service parts and the provision of services to the owner of IGM products. Every precaution is made to ensure that such dealers carry adequate stocks of service parts and are equipped to provide satisfactory service, but makes no promise other than that contained by the IGM new vehicle warranty. All such parts or service facilities will be available or available at any specific location at any particular time. A word about this specification sheet. We have tried to make it as comprehensive and factual as possible. However, since the time of printing some of the information you will find here may have been updated. Also some of the equipment described is described through this specification sheet may have been changed and is available at www.isuzu.com.au. And the right is reserved to make changes at any time without notice, in prices, colors, materials, equipment and methods. Some IGM dealers that details and before ordering, you should ask whether to bring over you to date.

AIR CLEANER

- Donaldson 11" two stage with vertical air intake stack and rain head.

CHASSIS FRAME

- Parallel rail, ladder type channel section, cold riveted.
- Straight frame for easy body mounting. Frame width 840 mm.
- Side member dimensions: 229 mm x 71 mm x 8 mm.
- Material, SAPH440, weldable mild steel

COOLING SYSTEM

- 6 blade plastic cooling fan 500 mm diameter with thermatic fan clutch.
- Corrugated fin radiator with fan shroud. Frontal area 3820 cm². Coolant capacity 23.3 litres.

ELECTRICAL SYSTEM

- Batteries - 2 x 12 volt / 65 amp/h, negative earth.
- Alternator - 24 volt / 40 amp.
- Starter motor - 24 volt / 4.5 kW.
- Rear stop and tail lamps and licence plate lamp with long leads for variable body mounting.

EXHAUST SYSTEM

- Horizontal exhaust muffler with vertical exhaust stack.
- Exhaust brake, air controlled.

FRONT AXLE ISUZU FD039 CAPACITY 3900 KG

- Split type, fully floating with Birfield type steering ball joint. Ratio : 5.125 : 1
- Spiral bevel type ring gear, 365 mm diameter. Oil capacity 3.2 litres.

FRONT SUSPENSION

- Semi-elliptical, alloy steel tapered multi-leaf springs. Fully wrapped eye with greaseable shackles.
- | Length | x | Width | x | Thickness | x | No. leaves |
|---------|---|-------|---|-----------|---|------------|
| 1350 mm | x | 70 mm | x | 12 mm | x | 2 |
| | | 70 mm | x | 14 mm | x | 2 |
| | | 70 mm | x | 16 mm | x | 1 |
- Hydraulic, double acting, telescopic shock absorbers.

FUEL SYSTEM

- In line plunger, Bosch 'ADS' type fuel injection pump with mechanical all speed governor. In line filter, see through water separator with drain cock. Single fuel tank, capacity 180 litres.

LUBRICATION SYSTEM

- Pressure feed lubrication with combination full flow and partial flow by-pass filter. Plate type oil cooler in water jacket. Oil capacity 13.5 litres including filter.

REAR SUSPENSION

- Semi-elliptical, alloy steel tapered multi-leaf springs. Fully wrapped eye with greaseable shackles.
- | | Length | x | Width | x | Thickness | x | No. leaves |
|-------|---------|---|-------|---|-----------|---|------------|
| Main: | 1300 mm | x | 70 mm | x | 11 mm | x | 3 |
| | | | 70 mm | x | 12 mm | x | 4 |
| Aux: | 850 mm | x | 70 mm | x | 10 mm | x | 3 |
| | 850 mm | x | 70 mm | x | 11 mm | x | 4 |

STEERING

- Fully integral, power assisted, recirculating ball type.
- Gear ratio 16.1 ~ 18.8 : 1. Turns lock to lock 2.8.
- Gear driven vane type oil pump. Oil capacity 1.5 litres.

TOOLS

- Lockable tool box with 7,000 kg capacity jack and wheel changing tools, tool kit.

WHEELS AND TYRES

- 6.50T x 20, 8 stud disc wheels, 8.25R20 tubed tyres front and rear.
- Number of wheels and tyres 7, including spare. Winch type spare wheel carrier.

CAB EXTERIOR

- All steel, power tilt 4 door cab with welded strengthening ribs and side door impact beams.
- Cation electrodeposition primer.
- Bumper bar with step holes and footplate.
- Halogen headlamps, hinged for easy bulb replacement. Park lamps and cab clearance lamps.
- Turn signal lamps in front bumper and doors.
- 2 speed wiper/washer with variable intermittent mode. Triple washer jets mounted on wiper arms.
- Tinted, laminated windshield; tinted, toughened side and rear glass.
- West Coast type rear view mirrors. Convex mirror surface on passenger side.
- Alloy non-slip cab front entry steps. Steel rear entry steps.
- Lift up front access panel for clutch and windscreen washer fluids, cab air filter screen. Engine and brake fluid check points at rear of cab.

CAB INTERIOR

- Driver's seat with mechanical suspension and 3 way lumbar support. Adjustment for seat back recline, seat slide and weight control.
- Outboard reclining passenger seat with under-seat storage drawer. Folding centre seat back with lockable compartment and tray.
- Rear 4 person bench seat.
- Vinyl seat material and heavy duty vinyl floor mat, formed roof lining. Overhead storage lockers. Driver and passenger sun visors.
- All outboard seating positions have lap/sash seat belts with emergency locking retractors. All inner seating positions have lap seat belts.
- Pull out drinks holder in centre fascia, cigarette lighter with ash trays in all doors.
- Tilt/telescopic adjustable steering column, soft feel urethane steering wheel.
- Easy entry grab handles on 'A' & 'B' pillars (front doors) and 'B' and 'C' pillars (rear doors).
- Heater demister with 4 speed fan, 4 outlet vents to screen, 5 fascia outlets, 5 foot outlets, demister ducts to door glass.
- AM/FM radio cassette with digital clock, dash mounted.
- DIN standard aperture in dash for CB radio.
- Park brake activation lever at left side of driver's seat.
- Rear vision mirror.
- Front passenger side assist grip. Full cab width grab rail for rear passengers.
- Driver's left foot rest.
- Business card clip.
- Elastic mesh pocket on driver's door.

INSTRUMENTATION

- Speedometer, odometer, trip meter and tachometer.
- Gauges for coolant temperature, fuel level and brake air pressure.

INDICATOR LAMPS

- Turn signals, parking brake on, high beam on, exhaust brake engaged.
- Reversing lamp and beeper.
- High/Low ratio engaged, Transfer Case (4WD) engaged.

WARNING LAMPS

- With warning bulb check switch.
- Battery charge, oil pressure, low air pressure, brake system, stop and tail light failure.

CONTROLS

- Left side combination stalk switch for exhaust brake, windscreen wipers and washer, hazard lamps.
- Right side combination stalk switch for headlamps, high beam and turn signals.
- Dash mounted switches for Transfer Case (4WD Engage and High/Low Range) control.
- Engine idle speed adjust control.
- Key operation for engine start and stop, external engine crank switch for service when cab is tilted.
- 2 interior lamps, each with 3 way switch, activated by either front door.
- 24 volt-2 pin accessory plug in centre console.

FSS 550 4X4/CREW

ISUZU
RELIABILITY IS EVERYTHING