



Isuzu TLD 54



4x2 Crew Cab

GVM 4800kg – GCM 6300kg with 7.00 x 15 – 8 ply

Engine:

Model: Isuzu 4BAI Diesel
 Type: In-line, overhead valve, indirect injection.
 Number of cylinders: 4.
 Bore & Stroke: 98mm x 92mm.
 Displacement: 2775cc.
 Output: 52kW @ 4000 rpm.
 Torque: 162Nm @ 2200 rpm.
 Compression Ratio: 19:1.
 RAC Rating: 23.8.

Axle Front:

Capacity: 1800kg.
 Type: I-Beam Axle, leaf spring.

Axle Rear:

Capacity: 3500kg.
 Type: Banjo. Fully floating axle, leaf-springs. Axle ratio: 6.142:1.

Brakes Service:

Type: Hydraulic. Vacuum assisted.
 Total lining area: 1752cm².

Park Brake:

Type: Mechanical internal expanding at rear of transmission.

Steering:

Recirculating Ball. Ratio: 27:1.

Clutch:

Type: Hydraulically operated dry single plate with diaphragm springs.
 Size: 240mm outside diameter. Total frictional area 502cm².

Cooling System:

Pressurised, tube and corrugated fin radiator.

Electrical System:

12 volt, 120 amp. hr. – neg. earth.
 Alternator: 12 volt, 40 amp.
 Starter: 12 volt, 2.2kW.

Frame:

Channel section, ladder frame.
 Width: 730mm front, 680mm rear.
 Side members dimensions: 170mm x 65mm x 4.5mm.

Suspension:

Semi-elliptic, alloy, leaf springs. Hydraulic double-acting telescopic shock absorbers at front and rear.

Transmission:

Type: Model MSB5S 5-speed over-drive, synchromesh on all forward gears. Floor mounted.

Ratios (to 1):

1st	2nd	3rd	4th	5th	Reverse
5.037:1	2.683:1	1.591:1	1000:1	0.782:1	4.802:1

Wheels and Tyres:

Dual rear wheels.
 Wheels: 5.5F x 15.
 Tyres:
 Front: 7.00 x 15 – 8 P/R.
 Rear: 7.00 x 15 – 8 P/R.

Engine Lubrication:

Type: Full pressure with full-flow paper element oil filter.
 Capacity: 8 litres with filter, 6.5 litres without filter.

Fuel System:

Injection pump – Bosch in-line mechanical and pneumatic combined governor.
 Fuel Tank Capacity: 90 litres.

Standard Equipment:

Vents – side and floor. Inside rear vision mirror. Driver and passenger assist grips. High back bucket seat. 2 seater vinyl passenger seat. 3 seater rear passenger seat. Combination switch for headlamp dimmer, turn signal, passing signal, windshield washer and wiper. Lighting switch. Speedometer. Horn – single tone. Sun-visor. Ashtray. Cigar Lighter. Dual round headlights – sealed beam. Dual exterior mirrors. Two speed windshield wiper/washer. Laminated windscreen. Vinyl floor mats. Two-speed heater/demister. Spring loaded passenger seat lifts easily for convenient access to engine. Spare tyre and wheel. General Hand Tools. AM Radio.

GMH 12/20 Warranty:

Every Isuzu is protected by the GMH Warranty which covers your vehicle for the first 12 months or 20,000 kilometres.

PLEASE NOTE: As the policy of General Motors-Holden's is one of continual product improvement, all specifications and equipment are subject to change without notice.



Reliability is everything.

Isuzu TLD 54

4x2 Crew Cab



DIMENSIONS/CHASSIS MASS

Lengths:

Wheelbase	WB	3305
Front overhang	FOH	1010
Rear overhang	ROH	1460
Bumper to back of cab	BBC	2435
Cab to axle	CA	1880
Axle to vertical exhaust	VA	1760
Cab to end of frame	CE	3340
Overall length	OAL	5775

Widths:

Frame width	FW	680
Front track	FT	1385
Rear track	RT	1425
Outside rear track	ORT	1850
Overall width	OAW	1690

Heights:

Overall height (approx)	OAH	1980
Front axle clearance (approx)	B	190
Frame height at rear	EH	710



Turning Circle:

Kerb to Kerb	metres	13.6
--------------	--------	------

PLEASE NOTE: As the policy of General Motors-Holden's is one of continual product improvement, all specifications and equipment are subject to change without notice. Bodies illustrated other than cabin are not standard.

No GMH dealer or other person is authorised or permitted to give or make any statement assertion or undertaking in relation to the quality performance characteristics descriptions or fitness for any purpose of any GMH product or in connection with the supply of any GMH product, which is at variance with any written statement assertion or undertaking on any of these subjects given or made by General Motors-Holden's Limited or General Motors-Holden's Sales Pty. Ltd. in its published sales literature, and neither company accepts any liability for any such unauthorised action.

General Motors-Holden's Limited and General Motors-Holden's Sales Pty. Ltd. have franchised dealers in many parts of Australia for the sale of service parts and the provision of service to owners of GMH's products. Every endeavour is made to ensure that such dealers carry adequate stocks of service parts, and are equipped to provide satisfactory service, but neither General Motors-Holden's Ltd. nor General Motors-Holden's Sales Pty. Ltd. makes any promise, other than that contained in the New Vehicle Warranty given by General Motors-Holden's Sales Pty. Ltd., that such parts or service facilities will be available, or available at any specific location or any particular time.

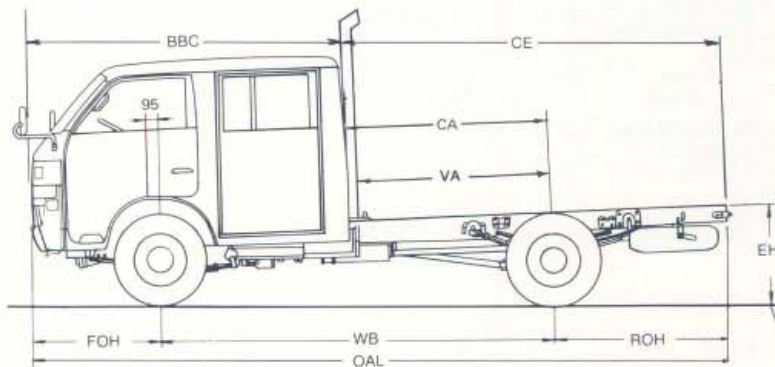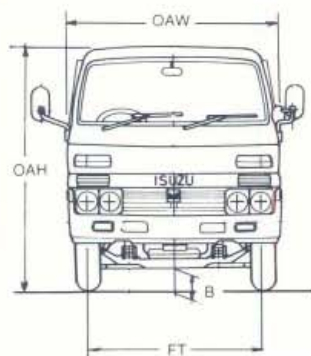

ESTIMATED KERB MASS FOR CREW CAB: (with oil, water and full fuel tank)

Front (kg)	1289	Rear (kg)	688	Total (kg)	1977	Tyres	7.00 x 15 (8)	GVM (kg)	4800	GCM (kg)	6300
------------	------	-----------	-----	------------	------	-------	---------------	----------	------	----------	------