



ISUZU NKR 57E

Single Rear Wheels (Replaces TLD 24)

GMH MODEL: NKR 57E-1E
ORDERING CODE: 8DE 01.

STANDARD GVM 4200 kg.
STANDARD GCM 6300 kg.
TARE MASS 1645 kg.

DRIVELINE SPECIFICATION

ENGINE

Model: Isuzu 4BC2
Type: Diesel 4 cylinder in-line
direct injection
Displacement: 3268 cc
Max Power: 65kW @ 3500 rpm
Max torque: 200 Nm @ 2200 rpm
Bore & stroke: 102 x 100mm
Compression ratio: 170:1
RAC Rating: 25.8

TRANSMISSION

Model: ISUZU MSB5S
Type: 5-speed overdrive
Gear Ratios: (to 1)

1st	5.016
2nd	2.672
3rd	1.585
4th	1.000
5th	0.770
Rev	4.783

AXLE, FRONT

Type: Reverse Elliot I beam
Capacity: 2,200 kg

AXLE, REAR

Type: Banjo fully-floating
Capacity: 3000 kg
Ratio: 5.375:1


CHASSIS RATINGS

GROSS VEHICLE AND GROSS COMBINATION MASS RATING (kg).

ESTIMATED KERB MASS (chassis and cab with oil,
water and full fuel tank).(kg)

GVM	GCM	TYRES	Front	Rear	Total
4200	6300	750 x 15-10 ply	1140	505	1645

DIMENSIONS

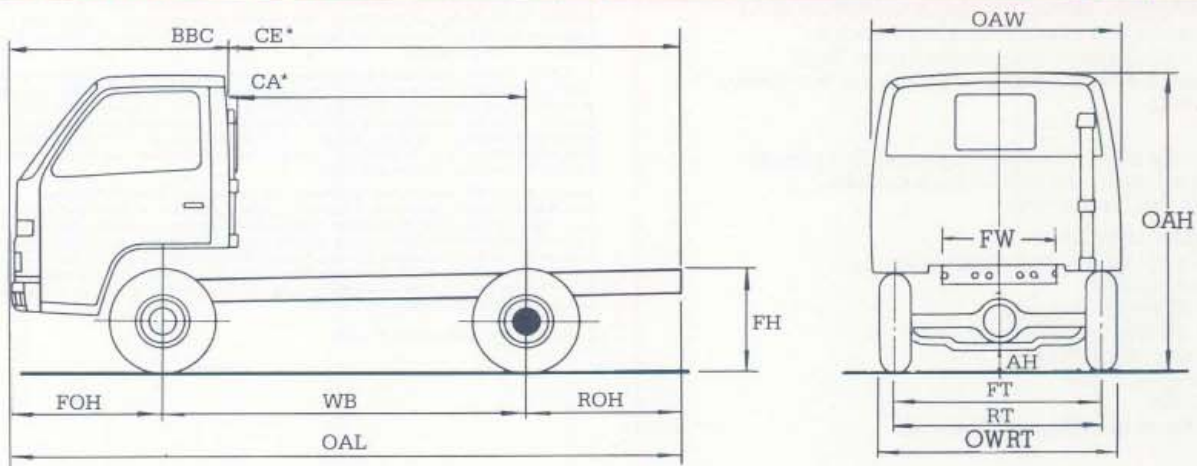

Front	Rear	Total
LENGTHS:		(mm)
Overall Length	OAL	4590
Wheelbase	WB	2490
Cab to axle	CA*	2035
Cab to end of frame	CE*	3120
Front Overhang	FOH	1015
Rear Overhang	ROH	1085
Bumper to back of cab	BBC	1490

WIDTHS		
Overall width	OAW	1690
Frame width	FW	800
Front track	FT	1385
Rear track	RT	1395
Outside width		
Rear tyres	OWRT	1605

HEIGHTS

Overall height	OAH	1990
Ground to top of frame	FH	750 Approx.
Axle clearance	AH	190

TURNING CIRCLE

Kerb to kerb	(m)	10.4
Wall to wall		11.6

*CA & CE dimensions are effectively reduced 95mm with the fitment of vertical air intake.



ISUZU
Reliability is everything.

ISUZU NKR 57E

Single Rear Wheels

(Replaces TLD 24)

CAB/CHASSIS COMPONENT SPECIFICATIONS

AXLE, FRONT

Type: Reverse Elliot I beam
Capacity: 2200 kg

AXLE, REAR

Type: Banjo, fully floating
Capacity: 3000 kg
Ratio: 5.375:1
Final gear: Hypoid

BRAKES, SERVICE

Type: Hydraulic, dual circuit, front two leading, rear dual, two leading
Total lining area: 1288cm²

BRAKE, PARKING

Type: Mechanical, at rear of transmission

CABIN EXTERIOR

Aerodynamic all steel tilt type cab laminated windshield. 2 speed windshield wiper/washer. Double-action door hinges. Large non-skid entry steps to each side. Front quarter-vent windows. Four sealed beam rectangular headlamps. Fog lamps. Energy absorbing polypropylene front bumper. Vertical air intake -air cleaner mounted high on chassis. Large exterior mirrors. General hand tools and 4000kg capacity jack.

INTERIOR

Adjustable and reclining driver's bucket seat. 2 seater passenger seat which lifts for oil and coolant check. Full length glove compartment. Window washer tank located in passenger door. Front side quarter vent windows. AM Radio. Heater demister with 3 speed fan. Driver and passenger sunvisors. Padded roof lining. Easy access pull down fuse cover.

INSTRUMENTATION

Speedometer with odometer and trip meter. GAUGES for fuel level and engine temperature. INDICATOR LIGHTS for turn signal, park brake on and headlamp high beam. WARNING LAMP for battery charge, brake failure, glow plug, oil pressure. Left side combination switch for windscreen wash/2 speed windscreen wipers. Right side combination switch for turn indicators and headlamps. Foglamp switch.

CLUTCH

Type: Dry single plate with diaphragm spring, hydraulic control with automatic adjusting clutch cylinder.
Size: 260mm outside diameter.

ENGINE SPECIFICATIONS

Type: Diesel 4 cylinder in-line direct injection
Displacement: 3268cc
Max power: 65kW @ 3500 rpm
Max torque: 200Nm @ 2200 rpm
Bore and Stroke: 102x100mm
Compression ratio: 170:1
RAC rating: 25.8
Automatic Engine Stop Device (Fuel cut)

YOUR GMH ISUZU DEALER:

LUBRICATION

Pressure feed with full flow paper element oil filter, Capacity 8.0 litres with filter.

COOLING

400mm plastic fan

AIR INTAKE

Vertical air intake behind cab

AIR CLEANER

Paper element (cartridge type)

FUEL SYSTEM

Fuel injection pump: in-line plunger Bosh 'A'
Mechanically governed. Fuel filter/water separator.
Fuel tank capacity: 75 litre

ELECTRICAL SYSTEM

Batteries: 2x12volt 60 AMP/Hour
Alternator: 24 volt — 20 AMP
Starter: 24 volt — 3.5 kW

FRAME

Type: Ladder type channel section
Side member dimensions:
Height x Width x Thickness
170 x 50 x 4.5mm

STEERING

Type: Recirculating ball, 430mm diameter 2 spoke steering wheel
Gear ratio: 26—30.5:1

SUSPENSION, FRONT

Type: Semi-elliptical alloy steel leaf springs
Size: Length x Width (mm) — No. of leaves
1140 x 60 — 6

Shock absorbers: Hydraulic, double acting telescopic

SUSPENSION, REAR

Type: Semi-elliptical alloy steel leaf springs
Size: Length x Width (mm) — No. of leaves
Main 1200 x 70 — 3

Auxiliary: 760 x 70 — 2

Shock absorbers: Hydraulic, double acting, telescopic.

TRANSMISSION

Type: Isuzu 5 speed overdrive

Gear Ratios (to 1)

1st 5.016 2nd 2.672 3rd 1.585 4th 1.000

5th 0.770 Rev 4.783

TYRES AND WHEELS

Single Rear Tyres

Tyre size: 750 x 15 —10 ply

Wheel : 5.50 Fx15,6 stud

Spare tyre and wheel mounted on carrier.

GMH 12/20 WARRANTY

Every Isuzu is covered by the GMH warranty which covers your vehicle for the first 12 months or 20,000 kilometres.

PLEASE NOTE. As the policy of General Motors-Holden's is one of continual product improvement, all specifications and equipment are subject to change without notice. Bodies illustrated are not standard.

No GMH Dealer or other person is authorised or permitted to give or make any statement assertion or undertaking in relation to the quality performance characteristics descriptions or fitness for any purpose of any GMH product or in connection with the supply of any GMH product, which is at variance with any written statement assertion or undertaking on any of these subjects given or made by General Motors-Holden's Limited or General Motors-Holden's Sales Pty Ltd. in its published sales literature, and neither company accepts any liability for any such unauthorised action.

General Motors-Holden's Limited and General Motors-Holden's Sales Pty. Ltd. have franchised dealers in many parts of Australia for the sale of service parts and the provision of service to owners of GMH's products. Every endeavour is made to ensure that such dealers carry adequate stocks of service parts, and are equipped to provide satisfactory service, but neither General Motors-Holden's Ltd. nor General Motors-Holden's Sales Pty. Ltd. makes any promise, other than that contained in the New Vehicle Warranty given by General Motors-Holden's Sales Pty. Ltd., that such parts or service facilities will be available, or available at any specific location or any particular time.

General Motors Holden's Sales Pty. Ltd.



Reliability is everything.