



# Isuzu CVR 162T



## Chassis/cab, single drive.

GVM 14,200kg – GCM 32,000kg  
with 10.00 x 20 – 14 ply tyres front and 12 ply tyres rear

### Engine:

Model: Isuzu 6RAIT.  
Type: Six cylinder in line, 4 cycle, overhead valve, direct injection turbocharged diesel.  
Bore and Stroke: 135mm x 140mm.  
Displacement: 12023cm<sup>3</sup>.  
Max Net Power: DIN 190kW @ 2300 rpm.  
Max Torque: DIN 965Nm @ 1300 rpm.  
Compression Ratio: 15.5:1.  
RAC Rating: 67.8.

### Air Cleaner:

Donaldson paper element, vertical air intake system. Model FTG15 with Pre Air Cleaner.

### Axle Front:

Capacity: 5500kg.  
Type: Reverse Elliot I Beam.

### Axle Rear:

Capacity: 13,000kg.  
Type: Single reduction. Banjo, fully floating, hypoid gear, 470 mm dia.  
Final Gear Ratio: 4.875:1.

### Brakes, Service:

Dual circuit full air, front and rear leading trailing "S" – Cam. Exhaust brake. Air tank auto drain cock and L.S.P.V.  
Total lining area: 4499cm<sup>2</sup>.

### Park Brake:

Type: Spring/air at rear wheels.

### Clutch:

Spicer twin plate angle spring 350mm diameter hydraulically operated.  
Model AS2-1402.

### Drive Line:

Type: Tubular shafts, needle bearing universal joints.

### Electrical System:

Alternator: 24 volt – 40 amp.  
Batteries: 2 x 12 volt, 150 amp hr each battery. Negative earth.  
Starter: 24 volt, 7.4kW output.

### Frame:

Ladder type construction with channel section side members.  
Width: 850mm.  
Side Member dimensions: 285x85x7mm.

### Suspension Front:

Type: Semi-elliptical alloy steel leaf springs.  
Size: Length x width – number of leaves: 1450x80mm – 9.  
Shock Absorbers: Hydraulic double acting telescopic.

### Suspension Rear:

Type: Semi-elliptical alloy steel leaf springs.  
Size: Length x width – number of leaves: 1420x100mm – 7.

### Steering:

Type: Recirculating ball with Power Assist.

### Engine Lubrication:

Type: Pressure feed with full flow paper element and partial flow depth type oil filter. Oil cooler. Restriction warning indicator.  
Capacity: 25 litres including filter.

### Engine Cooling:

Fan Type: 7 blade plastic fan, 610mm diameter.  
Heavy Duty Radiator: 700x691x88mm tube and corrugated fin with sub tank.  
Frontal area: 4837cm<sup>2</sup>.  
Corrosion Resistor.

### Fuel System:

Injection pump: Diesel Kiki in-line P-type with all speed governor and pre fuel filter.  
Fuel Tank Capacity: 430 litres.

### Transmission:

Type: Fuller RTO 11613, 13 speed with overdrive.  
Ratios to 1.

Low:	12.56	5th:	2.46	7thO/D:	1.17
1st:	8.32	5thO/D:	2.15	8th:	1.00
2nd:	6.18	6th:	1.83	8thO/D:	0.87
3rd:	4.54	6thO/D:	1.60	Rev:	3.89
4th:	3.38	7th:	1.34	LowRev:	13.13

Optional Equipment: Fuller RT 11609 A – 9 speed transmission.

### Wheels & Tyres:

Wheel and rims: 7.50V x 20, 10 stud disc wheels.  
Tyres: 10.00x20-14ply front and spare, 12 ply rear.  
Spare wheel and tyre on lifting type carrier.  
 Optional Equipment: 10.00 R x 20 – 14 ply Radial Tyres.

### Standard Equipment:

**Exterior:** All steel "sleepers" cab with manual tilt and full-float cab suspension. Laminated windscreen and safety glass side and rear windows. Two speed and intermittent windshield wipers and washer. West Coast type rear view mirrors. Two stage entry step. Dual headlamps. Combination rear lamps. Lifting type spare wheel carrier. General hand tools and hydraulic jack. Tyre inflator.  
 Optional Equipment: Automatic cab tilt.

**Interior:** Telescopic tilt steering column. Multi-adjustable driver's air suspension seat: forward, aft, recline and suspension tension. Retracting seat belts. Large centre storage compartment. Overhead parcel shelf. \*Sleepers mattress and curtain. Ashtray. Sun visors. Cigar lighter. Dash, floor and cab roof ventilation points. Three speed fan and heater/demister. AM radio. Dual tone air horn.  
 Optional Equipment: Integrated air conditioning.

### Instruments:

Combination stalk control for turn signal, and drive headlamp dimmer, hazard warning flasher. Left hand stalk for windshield washer and wiper and exhaust brake. Speedometer, tachometer, gauges for dual air pressure, water temperature, oil pressure, fuel level, voltage. Indicators for turn signal, exhaust brake, high beam, spring brake and parking brake. Warning lights for battery charge, water level, air cleaner, fuel sediment, engine overheat, low air pressure, exhaust temperature, oil pressure, engine over-run, stop and tail lamp failure. Audible warning buzzer for engine over-run and exhaust temperature.

### GMH12/20 Warranty:

Every Isuzu is covered by the GMH Warranty which covers your vehicle for the first 12 months or 20,000 kilometres. Major driveline components have an extended warranty. Please consult your GMH/ISUZU dealer for complete details.

\* Except with optional 9 speed transmission.



**Reliability is everything.**

# Isuzu CVR 162T



## DIMENSIONS/CHASSIS WEIGHTS

Lengths:		mm
Wheelbase	WB	3700
Front overhang	FOH	1460
Rear overhang	ROH	1415
Bumper to back of cab	BBC	2030
Cab to axle	CA*	3130
Cab to end of frame	CE*	4545
Overall length	OAL	6575

\* CE and CA dimensions are effectively reduced by 424mm with fitment of vertical muffler.

Widths:		mm
Frame width (rear)	FW	850
Front track	AW	2050
Rear track	CW	1855
Outside rear track	BW	2475
Overall width	OW	2490


Height:		mm
Overall cab height (approx.)	OH	2960
Rear axle clearance (approx.)	HH	240
Frame height (approx.)	FH	1130

PLEASE NOTE: As the policy of General Motors-Holden's is one of continual product improvement, all specifications and equipment are subject to change without notice. Bodies illustrated are not standard.

No GMH dealer or other person is authorised or permitted to give or make any statement assertion or undertaking in relation to the quality performance characteristics descriptions or fitness for any purpose of any GMH product or in connection with the supply of any GMH product, which is at variance with any written statement assertion or undertaking on any of these subjects given or made by General Motors-Holden's Limited or General Motors-Holden's Sales Pty. Ltd. in its published sales literature, and neither company accepts any liability for any such unauthorised action.

General Motors-Holden's Limited and General Motors-Holden's Sales Pty. Ltd. have franchised dealers in many parts of Australia for the sale of service parts and the provision of service to owners of GMH's products. Every endeavour is made to ensure that such dealers carry adequate stocks of service parts, and are equipped to provide satisfactory service, but neither General Motors-Holden's Limited nor General Motors-Holden's Sales Pty. Ltd. makes any promise, other than that contained in the New Vehicle Warranty given by General Motors-Holden's Sales Pty. Ltd., that such parts or service facilities will be available, or available at any specific location or any particular time.

General Motors-Holden's Sales Pty. Ltd.

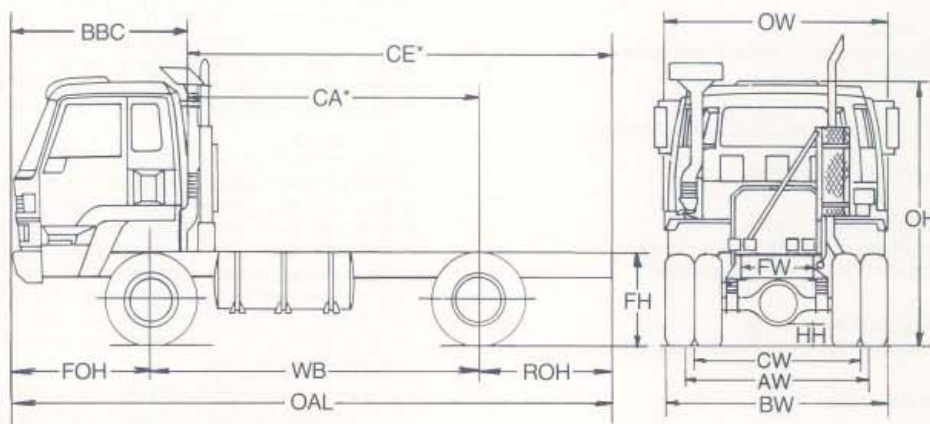

### GROSS VEHICLE AND GROSS COMBINATION MASS RATING (kg)

GVM	GCM
14200	32000

TYRES
10.00 x 20 (14 ply) front
10.00 x 20 (12 ply) rear

### ESTIMATED KERB WEIGHT, CHASSIS AND CAB: with oil, water and full fuel tank (kg.).

Front	Rear	Total
		6335