

NQR 450 NQR 450 Crew



NQR 450 Crew



NQR 450

AUSTRALIA'S TOP SELLING TRUCK BRAND SINCE 1989. Truck tracker 2009.

AT A GLANCE

GVM 8,700 kg **GCM** 12,200 kg

Power 139 kW @ 2,600 rpm

Torque 510 Nm @ 1,600 - 2,600 rpm

UPGRADE OPTIONS

Premium Pack:

- Automated Manual Transmission (AMT)
- Instrument panel multi-information display
- Cruise control
- Auto control for air conditioning
- Front foglamps
- Chrome grille
- Driver suspension seat single cab only

ADVANCED TECHNOLOGY

- Emissions: Euro V / ADR 80/03
- Driver and passenger airbag with seatbelt pretensioner
- ECE-R29 compliant cab
- Anti-lock Braking System (ABS)
- Anti Skid Regulator (ASR)
- Hill Start Aid (HSA) except premium pack
- Electric mirrors
- Front and rear stabiliser bars
- Driver suspension seat single cab premium pack only



RELIABILITY IS EVERYTHING ISUZU

Driveline & Chassis Specifications

ENGINE: SITEC SERIES III 185 (ISUZU 4HK1-TCC)

Type: 4 cylinder 16 valve SOHC

Displacement: 5,193 cc **Compression ratio:** 17.5:1

Bore x Stroke: 115 mm x 125 mm

Max power (DIN - NET): 139 kW (186 HP) @ 2,600 RPM

(JIS Gross): 144 kW (193 HP) @ 2,600 RPM

Max torque (DIN - NET): 510 Nm (376 lb.ft) @ 1,600 - 2,600 RPM

(JIS Gross): 528 Nm (389 lb.ft) @ 1,600 - 2,600 RPM

Induction system: Electronically controlled variable nozzle turbocharger with air-to-air intercooler.

Fuel injection: Direct injection high pressure common rail system.

Emission control system: Cooled EGR with exhaust

Diesel Particulate Diffuser (DPD). ADR 80/03 (Euro V) compliant.

CLUTCH

Standard model:

- Auto adjusting hydraulic control with vacuum assistance. Single plate 325 mm diameter.
- Total lining area: 966 cm²

Premium Pack:

 Fully automated hydraulically controlled wet clutch and fluid coupling with lock up.

TRANSMISSION

ISUZU MZZ-6F

- · PTO provision on LHS of transmission case. PTO drive from counter gear.
- · Gear ratios (: 1)

 1st
 2nd
 3rd
 4th
 5th
 6th
 Rev

 6.369
 3.767
 1.966
 1.355
 1.000
 0.782
 6.369

Standard model:

· 6 speed manual. Synchromesh on gears 1-6.

Premium Pack:

 6 speed Automated Manual Transmission (AMT) with both fully automatic and clutchless manual operation modes.

AXLES

Front: Isuzu F031

· Reverse Elliot I-beam. 3,100 kg capacity.

Rear: Isuzu R066

- · Full floating Banjo type. Four differential pinions. 6,600 kg capacity.
- Drive ratio: 4.100:1 (standard model), 4.300:1 (premium pack)


SUSPENSION

Front:

- Single cab: Single stage alloy steel taper leaf springs.
 Crew cab: Single stage alloy steel multi leaf springs.
- Double acting hydraulic shock absorbers. Stabiliser bar.

Rear:

- · Multi leaf main spring, multi leaf helper spring.
- · Double acting hydraulic shock absorbers. Stabiliser bar.

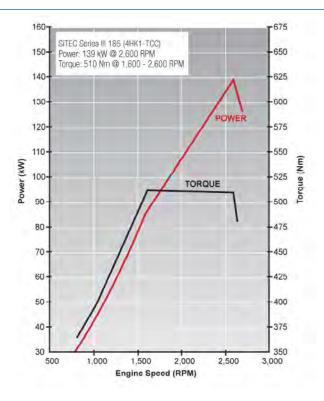

BRAKES

- Auto adjusting front disc and rear drum brakes with dual circuit hydraulic control, hydraulic pressure assistance and electronic brake force distribution (EBD).
- ABS and ASR traction control.
- . Hill Start Aid (HSA) except premium pack.
- Front disc diameter: 363 mm
- Rear drum size: 370 x 150 mm
- 203 mm diameter drum park brake mounted on rear of transmission.
- · Vacuum controlled exhaust brake.

STEERING

- · Power assisted recirculating ball steering.
- Gear ratio: 20.9:1
- Turns lock to lock: 5.4
- Maximum angle: 43° (inside wheel) / 33° (outside wheel)

WHEELS AND TYRES

- 19.5 x 6.00 six stud steel wheels.
- 225/70R 19.5 125/123L Michelin XZE Tubeless.
- Maximum tyre rating:

Steer axle: 3,300 kg Drive axle: 6,200 kg

1 frame mounted spare wheel and tyre assembly.

NQR Medium | Long | Crew

CHASSIS FRAME

- Cold rivetted ladder frame. SAPH440 weldable steel sidemembers. Parallel side rails and rivetless top flange.
- · Frame dimensions:

Side rail (mm): 216 x 70 x 6.0 Rear frame width (mm): 850

FUEL TANK

- · Frame mounted 140L steel fuel tank.
- · Lockable fuel cap.

ELECTRICAL SYSTEM

- · 24 volt electrical system.
- 80 amp alternator.
- · 4.5 kW starter motor.
- · 2 x 80D26L (630 CCA) batteries connected in series.

Cabin Specifications and Appointments

CAB EXTERIOR

- All steel construction. High tensile steel used for cab underframe.
 Single cab: Manual cab tilt to 45° with torsion bar assistance.
 Crew cab/single cab motorhome: Fixed cab mounting.
- Complies with ECE-R29 cab strength standard.
- Single cab: Liquid filled front and rear cab mounts.
 Crew cab/single cab motorhome: Rubber cab mounts.
- · Heavy duty non slip entry steps.
- · 90° opening internally reinforced front doors.
- · Water spray suppression quards and front mudflaps.
- · Laminated windscreen with shade band.
- Two speed windscreen wipers with intermittent wipe mode.
- Halogen multi-reflector headlamps incorporating turn signals. Additional door mounted side indicator lamps.
- Combination brake, turn, reverse and marker lamps, registration plate illumination lamps. Extended wiring harness. Reverse alarm.
- · Roof-mounted clearance lamps.
- Heated and powered exterior main mirrors with flat glass and additional independently adjustable convex "spot" mirrors.
- Except Premium Pack: Body coloured grille. Premium Pack: Chrome grille.
- Body coloured impact resisting polycarbonate bumper with steel backing frame.
 Premium Pack: Includes front foglamps.

CAB INTERIOR

- Contoured adjustable driver's bucket seat. Single cab Premium pack: includes mechanical suspension.
- · Front passenger bench seat with 2 seat capacity.
- Crew cab/motorhome: Engine access provided under removable driver seat base and tiltable front passenger seat.
- Crew cab: Rear bench seat with 4 seat capacity.
- 3-point lap sash seatbelts in all outboard seating positions. Driver and outboard front passenger seatbelts fitted with pretensioner. Centre seat lap belts.
- Driver and outboard front passenger airbag.
- Premium Pack: Driver's footrest.
- Door and roof pillar entry assist grips. Crew cab: Full width rear grab rail with ashtray.
- Full interior trim, padded roof lining and vinyl floor covering. Driver and passenger windscreen header storage shelf.
- · Tilt/Telescopic adjustable steering column, soft feel urethane steering wheel.
- · Electric windows.
- · Central locking with remote keyless entry and immobiliser.
- Twin cup holders. 24V cigarette lighter. Dashboard hook.

- · Front door mounted storage pockets and driver's side ashtray.
- Centre console box with storage tray. Fold down storage tray behind centre seat backrest.
- Fully integrated air conditioning and heater/demister with 4-speed fan and outlets for windscreen, side windows, face and floor. Except Premium Pack: Manual control. Premium Pack: Auto control.
- Interior lamp with On/Door/Off switch. Single cab: fluorescent type.
 Crew cab: standard type.
- 2 DIN, two speaker radio/CD multimedia unit with 4.8" LCD touch screen and Bluetooth. Provision for SD card, USB and 3.5 mm plug inputs.
- DIN sized compartment for storage or for CB radio installation.

DRIVER CONTROLS

- Key-operated engine start/stop and steering lock. Engine idle speed control.
- HSA slow/fast engagement control and on/off switch (except premium pack).
- ASR on/off.
- · DPD regeneration.
- Premium Pack: AMT slow/fast gear engagement control, 1st gear start and normal/economy gear selection modes.
- · Left side combination stalk: Windscreen wipers, washers and exhaust brake.
- Right side combination stalk: Turn signals and headlamps. Premium Pack: Cruise control.

INSTRUMENTATION

- Electronically driven speedometer and tachometer. Digital odometer with integrated dual tripmeter. Engine coolant temperature and fuel level gauges.
- Warning lamps: Check engine, oil pressure, ABS, SRS airbag, alternator charge, service brakes, park brake, seat belt unfastened, low fuel level. Premium Pack: Check AMT.
- Indicator lamps: HSA (except premium pack), warm up system, high beam, ASR, DPD status, exhaust brake, turn signals. Premium Pack: Cruise control, econo-mode, 1st gear start.
- Premium Pack: Gear selection display.
- Premium Pack: Multi-information display. Shows service interval, instantaneous and average fuel consumption, DPD bar chart, hourmeter, voltmeter, time/day/ date and includes 40-120 km/h adjustable vehicle speed warning.

OPTIONS AND GENUINE ACCESSORIES

Include the following (extra cost, request a brochure and further details from your Isuzu dealer):

- Satellite navigation integrates with multimedia unit and includes NAVTEQ mapping.
- . Up to three audio/visual reversing cameras integrates with multimedia unit.
- Airbag compatible bullbar.
- 3,500 kg rated towbar.
- Air deflector.






Weights (kg)								
Models	Ratings*		Loading Limi	t* (at ground)	Cab Chassis Mass#			
	GVM	GCM	Front	Rear	Front	Rear	Total	
NQR 450 Medium	8,700	12,200	3,100	6,200	1,850	995	2,845	
NQR 450 Medium Premium	8,700	12,200	3,100	6,200	1,870	1,035	2,905	
NQR 450 Long	8,700	12,200	3,100	6,200	1,910	1,040	2,950	
NQR 450 Long Premium / Motorhome Premium	8,700	12,200	3,100	6,200	1,930	1,080	3,010	
NQR 450 Crew	8,700	12,200	3,100	6,200	2,070	1,110	3,180	
NQR 450 Crew Premium	8,700	12,200	3,100	6,200	2,090	1,120	3,210	

Maximum Gross Trailer Mass: 750 kg (unbraked), 3,500 kg (braked) * Vehicle ratings and front/rear weight limits are subject to government regulatory requirements and weight distribution analysis. Consult your Isuzu dealer to select the correct vehicle for your specific application. # Cab chassis only as supplied and including 10 litres of fuel.

Dimensions (mm)								Turn Circle (m)					
Models	WB	OAL	F0H	ROH	EA	CE	RT	ORT	СН	FFA (unladen)	RFA (unladen)	RFH (unladen)	KERB TO KERB
NQR 450 Medium	3,365	5,985	1,110	1,510	2,680	4,302	1,670	2,150	2,280	710	815	855	12.4
NQR 450 Long / Long Motorhome	4,475	7,804	1,110	2,219	3,790	6,121	1,670	2,150	2,280	710	815	865	16.4
NQR 450 Crew	4,475	7,804	1,110	2,219	2,810	5,120	1,670	2,150	2,280	700	820	875	16.4

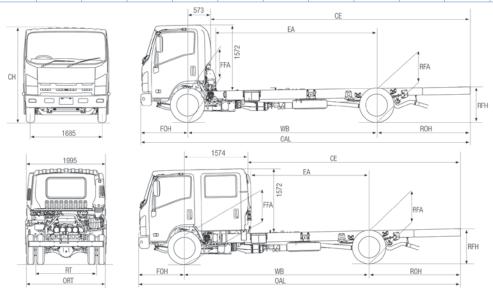

Performance (calculated - typical paved road)							
		Geared Speed* (top gear at peak power engine RPM)	Low Speed Gradeability (lowest forward gear assuming no wheel slip)	Engine Speed (top gear at 100 km/h)			
NQR 450	At 8,700 kg GVM	121 km/h @ 2,600 RPM	35%	2,145 RPM			
NQR 450 Premium Pack	At 8,700 kg GVM	116 km/h @ 2,600 RPM	37%	2,245 RPM			

^{*} Maximum speed achievable depends on vehicle frontal area as well as other factors. Consult your Isuzu dealer for more detailed information.

Isuzu Warranties						
STANDARD1						
New Vehicle 3 years 100,000 km 2,000 hrs						
Cab Perforation Corrosion 3 years Unlimited km						
EXTENDED ²						
4 years 200,000 km 5 years 250,000 km 6 years 300,000 km						
Isuzu Assist - 24 hour roadside assis	stance*					

Order Codes							
Code	Model	Code					
NH-NQRCC-B11	NQR 450 Motorhome Premium	NH-NQRPC-E11					
NH-NQRDC-D11	NQR 450 Crew	NH-NQRGC-C11					
NH-NQRCC-C11	NQR 450 Crew Premium	NH-NQRHC-E11					
NH-NQRDC-E11							
	Code NH-NQRCC-B11 NH-NQRDC-D11 NH-NQRCC-C11	Code Model NH-NQRCC-B11 NQR 450 Motorhome Premium NH-NQRDC-D11 NQR 450 Crew NH-NQRCC-C11 NQR 450 Crew Premium					

¹ Subject to the conditions outlined in the IAL New Vehicle Warranty, the Isuzu NOR models carry a standard factory warranty which covers the owner: (i) for the entire vehicle, for the first 36 months or 100,000 km or 2,000 hrs (whichever comes first). (ii) against cab perforation corrosion, for 36 months and unlimited kilometres. ² Extended Warranty as illustrated is available by purchase to cover the owner against the failure of original components, but may exclude some components and expendable items such as oil, filters, etc. Please consult with your Isuzu Dealer for full details obtained from a dedicated brochure available to customers. *Valid for three years from the date of new vehicle purchases.

ISUZU AUSTRALIA LIMITED ABN 97 006 962 572 ("IAL"). The information in this brochure was correct at time of printing, but all measurements, specifications and equipment are subject to change without notice. Some equipment may have been changed and/or is available at extra cost. IAL may make changes at any time without notice, in prices, colours, materials, equipment and models. IAL makes all reasonable attempts to ensure the availability of all vehicles and equipment. The information in this brochure is general in nature. Your Isuzu dealer can confirm all measurements, specifications and vehicle / equipment availability upon request.

September 2010. ARK0499

