



# FVD950


## HEAVY DUTY AUTO CREW

Cab/Chassis specification as at November 2000.

### MODEL RATINGS AND DIMENSIONS

MODELS	ENGINE	RATINGS (kg)		TARE MASS* (kg)			DIMENSIONS (mm)								TURNING CIRCLE	
		GVM	GCM	TOTAL	FRONT	REAR	WB	OAL	ROH	CA	CE	FFH UNLADEN	FFH LADEN	RFH UNLADEN		RFH LADEN
FVD950 HD AUTO CREW	SITEC270	16,000	32,000	5,300	3,200	2,100	4,250	7,420	1,900	2,830	4,730	910	865	960	960	14.9

# Estimated mass of cab/chassis with oil, water and fuel tank containing 10 litres of fuel and excluding spare wheel (85kg) and tools (30kg).

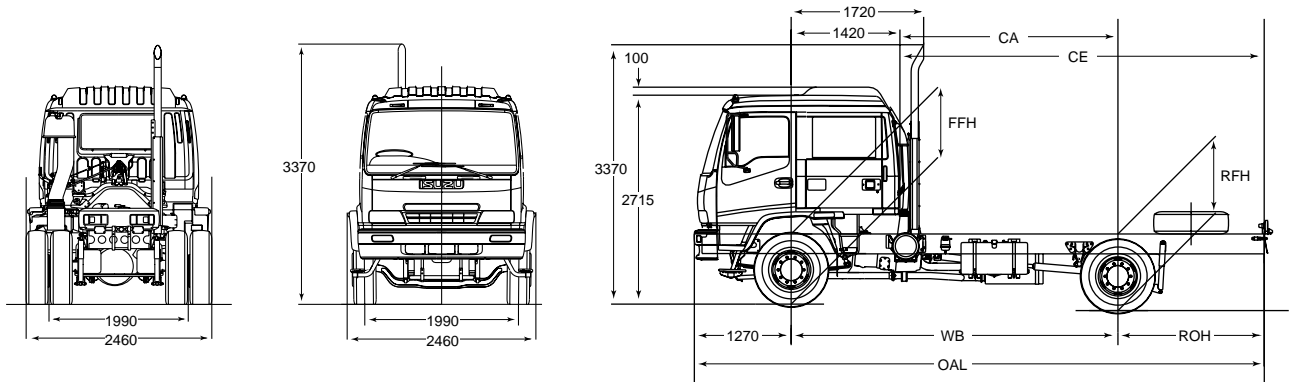

For further information regarding Cab/Chassis dimensions your Isuzu Dealer can access detailed Body Builders diagrams from the Isuzu Truck Data Manual.

### DRIVELINE SPECIFICATIONS

#### ENGINE: ISUZU SITEC 270

Isuzu 6SD1-TC 6 cylinder, in line, overhead camshaft, four stroke, direct injection, diesel.

Turbocharged and Air-To-Air Intercooled.

**BORE X STROKE:** 120 mm x 145 mm.

**DISPLACEMENT:** 9,839 cc.

**COMPRESSION RATIO:** 16.5 : 1.

**POWER:** 199 kW @ 2,200 RPM. (ISO 1585)

**TORQUE:** 1,000 Nm @ 1,500 RPM. (ISO 1585)

#### COOLING SYSTEM

- 6 blade plastic cooling fan 600 mm diameter with bell-mouth fan shroud and dual drive belts.
- Bimetallic controlled, thermatic fan clutch.
- Tube and corrugated fin, pressure type radiator. Dimensions: 800 mm x 636 mm x 54 mm. Frontal area 5,088 cm<sup>2</sup>.
- Coolant capacity 29.0 litres.

#### AIR INTAKE SYSTEM

- Donaldson 13" diameter, dry element, two stage filter. Vertical intake stack with rain head.
- Intercooler dimensions: 540 mm x 470 mm x 53 mm. Total intercooler frontal area 2,540 cm<sup>2</sup>.

#### EXHAUST SYSTEM

- Horizontal exhaust muffler with vertical exhaust pipe.
- Air controlled, butterfly type exhaust brake.

#### FUEL SYSTEM

- In line plunger, Bosch 'AP' type fuel injection pump with 'RLD' mechanical all speed governor.
- Electronic road speed limiter.
- In line, paper element filter, see through water separator with drain cock.
- Single steel fuel tank: 180 litres capacity.

#### TRANSMISSION

##### ALLISON MD3060P 6 speed overdrive

- Automatic Transmission with electronic control.
- Oil capacity: 24 litres.
- Gear ratios to 1:

1st	2nd	3rd	4th	5th	6th	Rev
3.49	1.86	1.41	1.00	0.75	0.65	5.03

- Maximum geared speed: 115 km/h
- 2,050 rpm at 100 km/h in 6th gear.
- Torque converter stall ratio: 2.02:1
- Electronically road speed limited to 100 km/h.
- Top mount PTO opening in flywheel housing.

#### FRONT AXLE

MERITOR FG941 CAPACITY 6,600 kg

- Reverse Elliot I-beam type, with 3.5 in. drop centres.
- 45° maximum wheel cut angle.
- Oil bath lubricated front wheel hubs with see-through oil level indicator.

#### REAR AXLE

MERITOR RS-23-161 CAPACITY 10,400 kg

- Banjo type, fully floating, single reduction.
- Rear Axle Ratio: 5.625
- Hypoid type ring gear, 457 mm diameter. Oil capacity 15.0 litres.
- Ready for Diff Lock.

# ISUZU

**RELIABILITY IS EVERYTHING**

ISUZU-GENERAL MOTORS AUSTRALIA LTD ABN 97 006 962 572. PLEASE NOTE: as the policy of I-GM is one of continual product improvement, all specifications and equipment are subject to change without notice. No I-GM dealer or other person is authorised or permitted to give or make any statement, assertion or undertaking in relation to the quality, performance, characteristics, descriptions or fitness for any purpose of any I-GM product or in connection with the supply of any I-GM product which is at variance with any written statement, assertion or undertaking on any of these subjects given or made by I-GM in its published sales literature, and the company accepts no liability for any such unauthorised action. I-GM has franchised dealers in many parts of Australia, for the sale of service, parts and the provision of service to the owners of I-GM products. Every endeavour is made to ensure that such dealers carry adequate stocks of service parts and are equipped to provide satisfactory service, but makes no promise, other than that contained in the I-GM new vehicle warranty, that such parts or service facilities will be available or available at any specific location or at any particular time. A word about this specification sheet. We have tried to make it as comprehensive and factual as possible. However, since the time of printing some of the information you will find here may have been updated. Also, some of the equipment shown or described through this specification sheet may have been changed and/or is available at extra cost. And the right is reserved to make changes at any time without notice, in prices, colours, materials, equipment and models. Your I-GM dealer has details and before ordering, you should ask him/her to bring you up to date.

ARK/IGM0001

## CABIN SPECIFICATIONS AND APPOINTMENTS

### CAB EXTERIOR

- All steel cab 4-door with welded strengthening ribs and side door impact beams. Electro-hydraulic cabin tilt to 35°.
- Roof section over rear seat raised by 100 mm for additional head room.
- Cation electrodeposition primer.
- Heavy duty bumper bar with step holes and footplate.
- Halogen headlamps, hinged for easy bulb replacement.
- Park lamps and cabin clearance lamps.
- Turn signal lamps in front bumper and over wheel arches.
- 2 speed windscreen wiper / washer system with variable intermittent mode. Triple washer jets mounted on wiper arms.
- Tinted and laminated windscreen. Tinted and toughened side and rear glass.
- 'West Coast' type rear view mirrors. Additional separately adjusted spotter mirror on each side.
- Alloy, non-slip cabin front entry steps. Steel rear entry steps.
- Lift-up front panel for access to clutch and windscreen washer fluids without tilting the cabin. Engine fluid check points at rear of cabin.

### CAB INTERIOR

- Fully trimmed cab interior with cloth seat facings, formed roof lining. Overhead storage lockers. Driver and passenger sun visors.
- Roof section over rear seat raised by 100 mm for additional head room.

- Pull out drinks holder in centre fascia, cigarette lighter with ash trays in doors.
- Isringhausen ISRI 6500/517 air suspension driver's seat with auto weight adjustment to 130 kg. Height, rake and back rest recline adjustment. Pneumatic lumbar support.
- Outboard passenger seat with under seat storage drawer.
- Rear bench seat with 4 seating positions.
- Outboard lap/sash seat belts with emergency locking retractors.
- Inboard lap-type seat belts.
- Tilt/telescopic adjustable steering column with single release lever. Soft feel urethane steering wheel with zero offset to driver's seat.
- Easy entry grab handles on 'A' and 'B' pillars (front doors) and 'B' and 'C' pillars (rear doors).
- Heater demister with 4 speed fan, 4 outlet vents to screen, 5 fascia outlets, 5 foot outlets, demister ducts to door glass.
- Optional fully integrated air conditioning.
- Eurovox AM/FM radio cassette with digital clock, dash mounted. Remote seek/volume and mute switch located on dash to right of steering wheel.
- Optional 6-stack CD player.
- DIN standard aperture in dash for CB radio.
- 12 Volt /100W cigarette lighter type electrical socket located in centre console.
- 24 Volt – 2 pin accessory plug in centre console.
- Park brake activation lever at left side of driver's seat.
- Combination passenger-side dash storage tray/fuse panel cover.
- Interior rear vision mirror.

- Passenger side assist grip.
- Driver's left foot rest.
- Exhaust vents rear/upper cab.
- Business card clip. Coat hook at rear of cab.
- Elastic mesh pocket on driver's door.
- Full width grab rail for rear passengers.

### CONTROLS

- Left side combination stalk switch for exhaust brake retarder (Hi & Lo positions), windscreen wipers and washer, hazard lamps.
- Right side combination stalk switch for headlamps, high beam and turn signals.
- Engine idle speed adjust control.
- Key operation for engine start and stop, external engine crank switch for service when cab is tilted.
- 2 interior lamps, each with 3 way switch, activated by driver's door.

### INSTRUMENTATION

- GAUGES: Speedometer, odometer, trip meter and tachometer. Gauges for coolant temperature, fuel level and brake air pressure.
- WARNING LAMPS: With warning bulb check switch. Battery charge, oil pressure, low air pressure, brake system, stop and tail light failure.
- INDICATOR LAMPS: Turn signals, parking brake on, high beam on, exhaust brake engaged. Reversing lamp and beeper.

### TOOLS

- Lockable tool box 10,000 kg capacity jack and wheel changing tools.

## CHASSIS SPECIFICATIONS

### CHASSIS FRAME

- Parallel rail, ladder type, channel section, cold riveted.
- Straight frame for easy body mounting. 850 mm frame width.
- Rear crossmember and spring hanger brackets bolted to frame allowing easy wheelbase modification.
- Frame side member dimensions: 258 mm x 85 mm x 10 mm.
- Frame reinforcement angle 'L' section: 224 x 85 x 4.5 mm and 224 x 85 x 6.0 mm.
- Frame material: SAPH440 weldable mild steel.

### SUSPENSION

#### FRONT

- Alloy steel tapered leaf springs. Fully wrapped eye with greasable shackles.
- 1,600mm x 80mm x 3 leaves.
- Stabiliser bar.
- Hydraulic, double acting, telescopic shock absorbers.

#### REAR

- Hendrickson HAS230 Airbag. Capacity 10,400 kg. Featuring two rolling lobe air springs, proprietary "Z-beam" main support members, transverse torque rod and stamped steel cross channels for

excellent roll stability.

- Outboard mounted, double acting shock absorbers.
- Dual height control valves.

### BRAKES

- Meritor 'Q-Plus' full air, 'S'-cam, dual circuit brake system with front and rear leading and trailing shoes. Asbestos free brake shoe lining material.
- Drum diameters (front and rear): 419 mm.
- Brake drum swept areas: 8,030 cm<sup>2</sup>. Total lining area: 4,864 cm<sup>2</sup>.
- Air reservoir capacity: 78.5 litres in total. Heavy duty air compressor (335 litres/min).
- Spring park brake acting on rear wheels.
- Air controlled, butterfly type exhaust brake.
- Nylon brake air tubing.
- Air dryer.
- Automatic slack adjusters.
- Isuzu 2-Stage High Power permanent magnet retarder.
- Maximum retardation 650 Nm. Operates in conjunction with butterfly type exhaust brake.

### STEERING

- Fully integral power assisted recirculating ball and nut type.

- Gear ratio 22.4 : 1. Turns lock to lock 4.5.
- Gear driven vane type oil pump. See-through oil reservoir. Oil capacity 2.5 litres (inc. reservoir).

### WHEELS AND TYRES

- 8.25 x 22.5, 10 stud ISO standard (hub piloted) disc wheels. Stud size: 22 mm. Offset: 165 mm.
- 275/70R22.5 148/145L tubeless radial tyres front and rear.
- Type: Michelin XZE2 (Front and Spare) Michelin XDE2 (Rear)
- Load and speed ratings per tyre: 3,150 kg (single) / 2,900 kg (dual) 130 km/h.
- Spare wheel and tyre provided, temporarily mounted on top of chassis frame.
- Number of wheels and tyres 7, including spare.

### ELECTRICAL SYSTEM

- Batteries – 2 x 12 volt / 65 amp/h, negative earth.
- Alternator – 24 volt / 60 amp (1.5 kW output.)
- Starter motor – 24 volt / 4.5 kW.
- Rear stop and tail lamps and licence plate lamp with long leads for variable body mounting.

## ISUZU NEW TRUCK WARRANTIES

	STANDARD TRUCKPOWER WARRANTY*		TRUCKPOWER EXTENDED WARRANTY OPTIONS*		
NEW VEHICLE	2 years	150,000 km	3 years / 200,000 km	4 years / 250,000 km	5 years / 300,000 km
DRIVETRAIN	3 years	200,000 km			
CAB CORROSION	3 years	unlimited			

\* Subject to the conditions outlined in the I-GM New Vehicle Warranty, the Isuzu FVD Heavy Duty models carry a standard factory warranty which covers the owner: (i) for the entire vehicle, for the first 24 months or 150,000 km (whichever comes first) (ii) for the powertrain, which runs concurrently for 36 months or 200,000 km (whichever comes first) (iii) against cab corrosion, for 36 months and unlimited kilometres.

# A TruckPower Extended Warranty as illustrated is available by purchase to cover the owner against the failure of original components, but excludes some components and expendable items such as oil, filters, etc. Please consult with your Isuzu Dealer for full details obtainable from a dedicated brochure available to customers.