

ISUZU NPR250/300

CREW CAB



ENGINE: ISUZU 4HG1

Type: 4 cylinder, 4 stroke, overhead camshaft, direct injection diesel.
Bore x Stroke: 115 mm x 110 mm
Displacement: 4570 cc
Compression Ratio: 19.0:1
Power*: 85 kW @ 3200 RPM
Torque*: 291 Nm @ 1600 RPM

- * Engine performance determined in accordance with EEC 80/1269.
- Integral engine oil cooler.
- Separate full-flow and bypass engine oil filters.
- Bosch 'A' type fuel injection pump with 'RLD' all-speed governor. Quick-start glow plug cold starting aid.

COOLING SYSTEM

- Pressurised cooling system. Tube and corrugated fin type radiator with 2447 cm² frontal area. 10-blade, plastic, 430 mm diameter cooling fan with thermatic / viscous type clutch.

CLUTCH

- Hydraulically actuated, 300 mm diameter, dry single plate with 8 coil cushioning springs, single diaphragm pressure spring. Asbestos free clutch lining material. Total lining area 847 cm².

TRANSMISSION: ISUZU MXA-5R

- 5 forward speeds including overdrive, 1 reverse speed, synchromesh on all gears. P.T.O. opening left hand side.
- Gear Ratios:

1st	2nd	3rd	4th	5th	Rev
4.987:1	2.870:1	1.594:1	Direct	0.728:1	4.774:1
- Maximum Theoretical Geared Speed: 109 km/h @ 3200 RPM
- 2-piece propeller shaft with 82.6 mm tube diameter.

REAR AXLE: ISUZU R040

- Banjo type with full floating axle shafts.
- Axle tube size: 96 mm x 96 mm x 6 mm
- Rated capacity: 4000 kg
- Single reduction, hypoid gearing with 292 mm ring gear and 4-pinion differential. Drive ratio: 5.857:1

FRONT AXLE: ISUZU F024

- Reverse Elliot I-Beam with 2400 kg capacity.
- 30 mm diameter king-pin with ball type thrust bearing.

BRAKES

- Front and rear drum brakes with dual circuit hydraulic control, vacuum assistance and load sensing proportioning valve.
Front Drum Diameter: 320 mm
Rear Drum Diameter: 320 mm
- Slave cylinder / shoe types:
Front: Two leading, manual adjust.
Rear: Dual two leading, manual adjust.
- Asbestos free brake linings.
Lining size (per wheel end):
Front: 2 x 307 mm x 75 mm x 9.6 mm
Rear: 2 x 307 mm x 75 mm x 9.6 mm
- Electro-vacuum controlled, butterfly type, 70 mm diameter exhaust brake.

- Drum parking brake on transmission output shaft. Control lever floor-mounted LHS of driver's seat.

AIR INTAKE SYSTEM

- Cartridge type, 150 mm diameter air filter and resonator mounted under cabin.

ELECTRICAL SYSTEM

- Batteries: 2 x 12 Volt / 65 Amp-Hour batteries in series for 24 Volt, negative ground system. Alternator: Hitachi 24 Volt / 50 Amp brushless type.
- Starting Motor: Hitachi 24 Volt / 4.0 kW reduction geared type. Rear brake, turn, reverse and marker lamp assemblies and rear registration plate lamp with additional wiring lengths. Reversing alarm.

EXHAUST SYSTEM

- Horizontal exhaust silencer. Chassis mounted, vertical exhaust stack.

FUEL SYSTEM

- Cylindrical, steel fuel tank with 115 litre liquid capacity and 10 litre expansion space. Fuel / water separator with warning lamp.
- Single stage fuel filter.

STEERING

- Integral power assisted, recirculating ball type steering. Lube-for-life drag link. Gear driven, vane type oil pump.
- Gear ratio: 20.9:1
- Turns lock to lock: 4.9

SUSPENSION

FRONT

- Alloy steel, multi-leaf springs with fully wrapped eye and metalastic bushes. Nominal size: 1140 mm x 70 mm
- Hydraulic, double acting, telescopic shock absorbers.
- Stabiliser bar.

REAR

- Alloy steel, multileaf, two-stage springs. Fully wrapped main spring eyes with metalastic bushes. Nominal spring lengths:
Main spring: 1250 mm x 70 mm
Auxiliary spring: 850 mm x 70 mm
- Hydraulic, double acting, telescopic shock absorbers.

WHEELS AND TYRES

WHEELS

- 6.00GS x 16 JIS 5 stud disc wheel.

TYRES

- 7.50R16LT 8 P.R. Australian made Goodyear G114A.
- Total of 7 wheels and tyres supplied including 1 spare wheel and tyre assembly.

CHASSIS FRAME

- [section rails with cold rivetted cross members forming ladder type frame.
- Rail dimensions:
Web: 173 mm x 6.0 mm
Flanges: 65 mm x 6.0 mm
- Frame width: 750 mm

CABIN EXTERIOR

- All steel, 4 door, fixed cabin with engine access hatch in floor. Extended front wheel arch spray suppression guards.
- 90° opening, internally reinforced front doors.
- Non slip, aluminium (front) and steel (rear) cabin entry steps. "West Coast" type rear view mirrors with clearance lamps. Flat mirror glass both sides with additional, independently adjustable convex "spot" mirror on passenger side. Easy access to fluid check points.
- Tinted and laminated windshield.
- 2-speed windshield wiper system with intermittent wipe mode. Windshield washer system with triple washer jets on each wiper arm and automatic wiper start and stop. 4 rectangular, semi-sealed type headlamps.

CABIN INTERIOR

- Entry assist handles on 'A' pillars (front) and 'B' pillars (rear). Front passenger side assist grip. Full width grab handle for rear passengers. Driver's bucket seat with reclining back and fore-aft adjustment. 2-person passenger bench seat with split, folding seat backs. Seat cushion tilts for access to engine. 4-place rear bench seat.
- Flat tray on back of centre and passenger seats. Paper clip on centre seat tray. Fire resistant cloth seat facings.
- 3-point, lap-sash seatbelts with emergency locking belt retractors in all outboard seating positions. 2-point lap seatbelt in inner seating positions. Driver and passenger fold-down sun visors.
- Interior rear-vision mirror.
- Padded roof lining and vinyl floor mats.
- Centre storage console.
- "Glove" compartment with door.
- "Soft feel" urethane steering wheel. Steering column with tilt and telescope adjustments. Heater / Demister with 4-speed fan and windscreen, face and floor outlets. Optional fully integrated air conditioning. Fore-aft adjustable roof vent.
- AM / FM Stereo Radio / Cassette with integrated digital clock. Centre fascia pull-out drinks holder.
- Easy access fuse panel (behind glove compartment door).
- Windshield washer reservoir under glove compartment.
- Centre fascia and driver's door ash trays.
- Interior lamp with On / Door / Off switch.

CONTROLS

- Key-operated engine start / stop and steering lock. Engine fast-idle vernier. Left Side Combination Stalk: Windshield wipers and washer; exhaust brake. Right Side Combination Stalk: Turn signals; position, main and high beam lamps. Hazard flash switch.
- Additional interior lamp switch on instrument panel adjacent to driver's door.

INSTRUMENTATION

- Gauges: Electronically driven speedometer and tachometer. Digital odometer with integrated, dual tripmeter. Engine coolant temperature and fuel level.
- Warning Lamps: Low battery charge, brake failure, low fuel level, glow plug, water separator.
- Indicator Lamps: Turn signals, parking brake, high beam, exhaust brake.

TOOLS

- Chassis frame mounted spare wheel and tyre winch. Wheel changing tools including 4000 kg capacity hydraulic jack. Hand tools in kit bag.

WARRANTY

- A warranty of 24 months / 50,000 km (whichever occurs first) applies to the cab-chassis vehicle. A concurrent warranty of 36 months / 100,000 km (whichever occurs first) applies to powertrain components. A concurrent warranty of 36 months (unlimited distance) applies to cabin corrosion perforation.

MODEL, CODES, RATINGS

MODEL	GVM	GCM	ORDERING CODE
NPR250 Crew	4490kg	6490kg	8NR03-231-C7A
NPR300 Crew	6200kg	8200kg	8NR03-231

KERB MASS* (kg)


	Front	Rear	Total
NPR250 Crew	1,640	840	2,480
NPR300 Crew	1,640	840	2,480

* Cab-chassis, all fluids and lubricants, 10 litres fuel, spare wheel, tyre, winch and tools.

DIMENSIONS (mm)

	NPR250 Crew	NPR300 Crew
WB Wheelbase	3365	3365
OAL Overall Length	5955	5955
CW Cabin Width	1995	1995
CH Cabin Height	2210	2210
CA Cabin To Axle (Effective)	1610	1610
FO Front Overhang	1085	1085
RO Rear Overhang	1505	1505
FW Frame Width	750	750
FFH Front Frame Height	695	695
RFH Rear Frame Height	770	770
FT Front Track (Mean)	1680	1680
RT Rear Track (Mean)	1650	1650
ORT Outside Rear Track	2125	2125
Turning Circle (Kerb to Kerb)	12.3 M	12.3 M

Dimensions are estimates for vehicle laden to GVMR. For other dimensions refer to body builder's diagram.

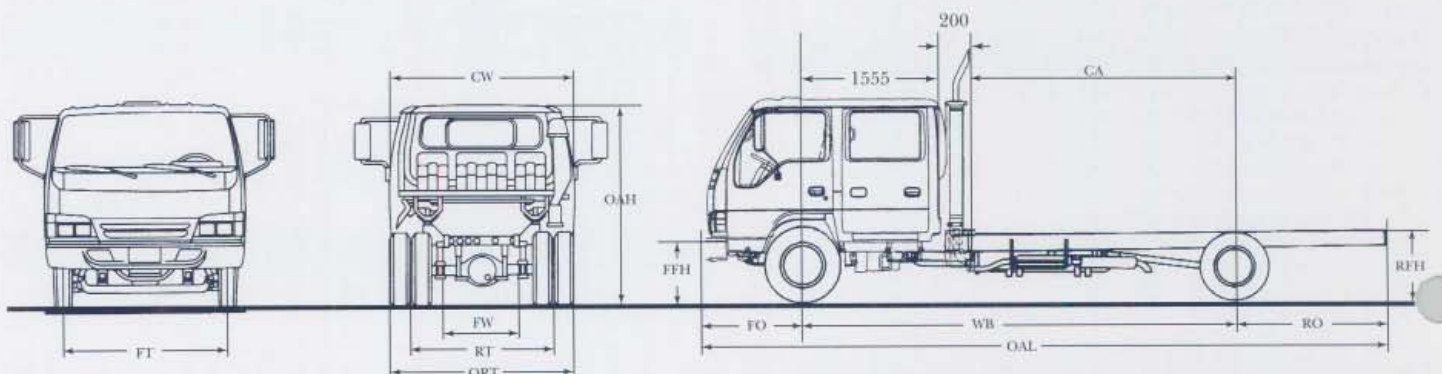

NPR250/300

CREW CAB

ISUZU

RELIABILITY IS EVERYTHING